

**THIS PAGE IS INSERTED BY OIPE SCANNING
AND IS NOT PART OF THE OFFICIAL RECORD**

Best Available Images

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

BLACK BORDERS ✓

TEXT CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT

BLURRY OR ILLEGIBLE TEXT

SKEWED/SLANTED IMAGES

COLORED PHOTOS HAVE BEEN RENDERED INTO BLACK AND WHITE

VERY DARK BLACK AND WHITE PHOTOS

UNDECIPHERABLE GRAY SCALE DOCUMENTS

**IMAGES ARE THE BEST AVAILABLE
COPY. AS RESCANNING *WILL NOT*
CORRECT IMAGES, PLEASE DO NOT
REPORT THE IMAGES TO THE
PROBLEM IMAGE BOX.**



104

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D06M	A2	(11) International Publication Number: WO 99/49124 (43) International Publication Date: 30 September 1999 (30.09.99)															
<p>(21) International Application Number: PCT/US99/06395</p> <p>(22) International Filing Date: 23 March 1999 (23.03.99)</p> <p>(30) Priority Data:</p> <table border="0"> <tr> <td>60/080,185</td> <td>24 March 1998 (24.03.98)</td> <td>US</td> </tr> <tr> <td>60/093,820</td> <td>23 July 1998 (23.07.98)</td> <td>US</td> </tr> <tr> <td>60/093,911</td> <td>23 July 1998 (23.07.98)</td> <td>US</td> </tr> <tr> <td>60/105,890</td> <td>27 October 1998 (27.10.98)</td> <td>US</td> </tr> <tr> <td>60/117,641</td> <td>28 January 1999 (28.01.99)</td> <td>US</td> </tr> </table> <p>(71) Applicant (<i>for all designated States except US</i>): AVANT-GARB, LLC [US/US]; Suite B, 5764 Shellmound Street, Emeryville, CA 94608 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (<i>for US only</i>): SOANE, David, S. [US/US]; 109 King Avenue, Piedmont, CA 94610 (US). OFFORD, David, A. [US/US]; 4267 Mabel Avenue, Castro Valley, CA 94546 (US).</p> <p>(74) Agents: JOHNSTON, Madeline, I. et al.; Morrison & Foerster LLP, 755 Page Mill Road, Palo Alto, CA 94304-1018 (US).</p>		60/080,185	24 March 1998 (24.03.98)	US	60/093,820	23 July 1998 (23.07.98)	US	60/093,911	23 July 1998 (23.07.98)	US	60/105,890	27 October 1998 (27.10.98)	US	60/117,641	28 January 1999 (28.01.99)	US	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published</p> <p><i>Without international search report and to be republished upon receipt of that report.</i></p>
60/080,185	24 March 1998 (24.03.98)	US															
60/093,820	23 July 1998 (23.07.98)	US															
60/093,911	23 July 1998 (23.07.98)	US															
60/105,890	27 October 1998 (27.10.98)	US															
60/117,641	28 January 1999 (28.01.99)	US															
<p>(54) Title: MODIFIED TEXTILE AND OTHER MATERIALS AND METHODS FOR THEIR PREPARATION</p>																	
<p>(57) Abstract</p> <p>Provided are compounds and methods for modifying a material to change properties of the material, as well as a variety of products obtained using the methods. The material which is modified may be, for example, a carbohydrate, and the modifiable functional groups on the material may be hydroxyls. Multifunctional molecules for use in modifying the surfaces of materials such as textile fibers, yarns and other fabrics made of or, including cotton, wool and nylon, are provided. The multifunctional molecules can include hydrophobic regions and/or hydrophilic regions. The multifunctional molecules also may include binding functional groups that permit either non-covalent or covalent binding to the material being modified, thus permitting the multifunctional molecule to form a non-covalent or covalent coating on the material. The methods and compounds disclosed herein may be used to modify materials to improve properties such as resistance, grease repellency, soil resistance, permanent press properties, and quickness of drying.</p>																	

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MODIFIED TEXTILE AND OTHER MATERIALS AND METHODS FOR THEIR PREPARATION

CROSS REFERENCE TO RELATED APPLICATIONS

5 This application claims the benefit of U.S. Provisional Patent Applications Serial No. 60/080,185, filed March 24, 1998; Serial No. 60/093,820, filed July 23, 1998; Serial No. 60/093,911, filed July 23, 1998; Serial No. 60/105,890, filed October 27, 1998; and Serial No. 60/117,641, filed January 28, 1999, the disclosures of which are incorporated
10 herein by reference in their entirety.

TECHNICAL FIELD

15 This invention relates generally to methods for the modification of textile and other materials, for example by the attachment of hydrophobic moieties, to impart properties thereon such as water repellency and permanent press.

BACKGROUND ART

20 Most chemical research in the textile field was conducted in the 1950s, 60s, and 70s. This work has been extensively reviewed. For example, see: Smith and Block, *Textiles in Perspective*, Prentice-Hall, Englewood Cliffs, NJ, 1982; *Handbook of Fiber Science and Technology*, Marcel Dekker, New York, NY, Vols. I-III, 1984; S. Adanur, *Wellington Sears Handbook of Industrial Textiles*, Technomic Publishing Company, Inc.,
25 Lancaster, PA, 1995; and Philip E. Slade, *Handbook of Fiber Finish Technology*, Marcel Dekker, New York, 1998). A large majority of this published research was never commercialized due to inhibitory costs or the impracticality of integration into textile production processes. There has been less research in this area in recent years. Most current work is centered on optimizing existing technology to reduce costs and comply
30 with recent government regulations.

Methods have been developed in the art for making textile materials water repellent. The terms "water repellent" and "waterproof" are distinguishable as related to textiles. Water repellent fabrics generally have open pores and are permeable to air and water vapor.

Waterproofing involves filling the pores in the fabric with a substance impermeable to water, and usually to air as well. For the purpose of everyday clothing, water repellent fabric is preferable because of the comfort afforded by the breathability of the clothing.

5 Current commercial processes for producing water repellent fabrics are based on laminating processes (C.J. Painter, *Journal of Coated Fabrics*, 26:107-130 (1996)) and polysiloxane coatings (Philip E. Slade, *Handbook of Fiber Science and Technology*, Marcel Dekker, New York, NY, Vol. II, 1984, pp. 168-171). The laminating process involves adhering a layer of polymeric material, such as Teflon®, that has been stretched to produce micropores, to a fabric. Though this process produces durable, water repellent films, it
10 suffers from many disadvantages. The application of these laminants requires special equipment and therefore cannot be applied using existing textile processes. Production of the film is costly and garments with this modification are significantly more expensive than their unmodified counterparts. The colors and shades of this clothing can be limited by the coating laminate film color or reflectance. Finally, clothing made from this material tends
15 to be heavier and stiffer than the untreated fabric. This material also can be disadvantageous due to mismatched expansion and shrinkage properties of the laminate. Polysiloxane films suffer from low durability to laundering which tends to swell the fabric and rupture the silicone film.

20 Methods of imparting hydrophobic character to cotton fabric have been developed including the use of hydrophobic polymer films and the attachment of hydrophobic monomers via physi- or chemisorptive processes. Repellents used based on monomeric hydrocarbon hydrophobes include aluminum and zirconium soaps, waxes and waxlike substances, metal complexes, pyridinium compounds, methylol compounds, and other fiber reactive water repellents.

25 One of the earliest water repellents was made by non-covalently applying water soluble soap to fiber and precipitating it with an aluminum salt. *J. Text. Res.* 42:691 (1951). However, these coatings dissolve in alkaline detergent solution, therefore washfastness is poor. Zirconium soaps are less soluble in detergent solutions (Molliet, *Waterproofing and Water-Repellency*, Elsevier Publ. Co., Amsterdam, 1963, p. 188);
30 however, due to the non-covalent attachment to the fabric, abrasion resistance and wash fastness are poor. Fabric also has been made water repellent by coating it with a

hydrophobic substance, such as paraffin. *Text. Inst. Ind.* 4:255 (1966). Paraffin emulsions for coating fabrics are available, for example, Freepel® (BF Goodrich Textile Chemicals Inc., Charlotte, NC). Waxes are not stable to laundering or dry cleaning. Durability is poor due to non-covalent coating of the fabric and breathability is low.

5 Quilon chrome complexes polymerize to form -Cr-O-Cr- linkages (R.J. Pavlin, *Tappi*, 36:107 (1953)). Simultaneously, the complex forms covalent bonds with the surface of fibers to produce a water repellent semi-durable coating. Quilon solutions require acidic conditions to react thus causing degradation of the fiber through cellulose hydrolysis. Fabric colors are limited by the blue-green coloration imparted by the complex.

10 Pyridinium-type water repellents have been reviewed by Harding (Harding, *J Text. Res.*, 42:691 (1951)). For example, an alkyl quaternary ammonium compound is reacted with cellulose at elevated temperatures to form a durable water-repellent finish on cotton (British Patent No. 466,817). It was later found that the reaction was restricted to the surface of the fibers (Schuglen et al., *Text. Res. J.*, 22:424 (1962)) and the high cure
15 temperature weakened the fabric. Pyridine liberated during the reaction has an unpleasant odor and the fabric had to be scoured after the cure. The toxicological properties of pyridine ended its use in the 1970s when government regulations on such substances increased.

20 Methylol chemistry has been extensively commercialized in the crosslinking of cellulose for durable press fabrics. N-methylol compounds are prepared by reaction of an amine or amide with formaldehyde. Alkyl-N-methylol compounds can be reacted at elevated temperatures in the presence of an acidic catalyst with the hydroxyl groups of cellulose to impart durable hydrophobic qualities to cotton. British Patent Nos. 463,300 (1937) and 679,811 (1952). The reaction with cellulose is accompanied by formation of
25 non-covalently linked (*i.e.*, non-durable) resinous material, thus decreasing efficiency. In addition, the high temperature and acid catalyst reduces the strength of the fabric. Recently, the commercial use of methylol compounds has been decreasing due to concerns of toxic formaldehyde release from fabrics treated in such a manner.

30 Long-chain isocyanates have been used to hydrophobically modify cotton. British Patent No. 461,179 (1937); Hamalainen, *et al.*, *Am. Dyest. Rep.*, 43:453 (1954); and British Patent No. 474,403 (1937)). The high toxicity of isocyanates and significant side reactions

with water, however, precluded it from commercial use. To circumvent the water sensitivity of isocyanates, alkyl isocyanates were reacted with ethylenimine to yield the less reactive aziridiny compound which was subsequently reacted with cellulose. German Patent No. 731,667 (1943); and British Patent No. 795,380 (1958). Though the toxicity of the aziridiny compound was reduced compared to the isocyanate, the procedure still required the handling of toxic isocyanate precursors. Also, the high cure temperature weakened the cellulose and crosslinkers were needed to increase structural stability. Alkyl epoxides have been reacted with cellulose under acidic or basic conditions to produce water repellent cotton. German Patent No. 874,289 (1953). Epoxides are, in general however, not very reactive and require long reaction times at high temperatures and therefore have not been extensively commercialized.

Acylation of cotton with isopropenyl stearate from an acidic solution of benzene and curing was used to produce a hydrophobic coating for cotton. U.S. Patent No. 4,152,115. The high cure temperature and acid catalyst however weakens the cotton. This method disadvantageously uses carcinogenic and flammable solvents. The practicality of using flammable solvents in fabric finishings is limited. Alkyl vinyl sulfones have been reacted with cellulose in the presence of alkali to form a water repellent finish. U.S. Patent No. 2,670,265. However, this method has not been commercialized because the alkali is not compatible with cross-linking reactants required for permanent press treatments.

Methods have been developed for imparting grease repellent properties to materials such as cotton. Perfluoroalkanoic acids have been applied in a variety of ways including as chromium complexes and as quaternary amines. U.S. Patent No. 2,662,835; Phillips *et al.*, *Text. Res. J.*, 27:369 (1957); Tripp *et al.*, *Text. Res. J.*, 27:340 (1957); and Segal *et al.*, *Text. Res. J.*, 28:233 (1958). Since these finishes are non-covalently linked to the fabric, they are not durable to laundering. Attempts were made to covalently link fluorocarbons to cotton with perfluorinated acid chlorides in the presence of the base pyridine and dimethylformamide solvent (Benerito *et al.*, *Text. Res. J.*, 30:393-399 (1960)), however significant problems were encountered. The pyridine base formed an insoluble complex with the acid chloride that could only be overcome with the addition of large excesses of pyridine or the solvent dimethylformamide. Also, the finish was readily subject to hydrolysis and not durable to laundering. Repellent finishes made by reaction of glycidyl

ethers of 1,1-dihydrofluoroalkanols with cellulose (Berni *et al.*, *Text. Res. J.*, 30:576-586 (1960)) produced a more durable finish, but required a reaction time of 30 h at 100°C and were not extensively commercialized. Interest in monomeric fluorocarbon finishes has been superseded by the use of fluorinated polymer films.

5 Methods also have been developed for modifying cotton by crosslinking in order to impart permanent press properties to the material. These methods have been reviewed in: R.M. Rowell and R.A. Young, Eds., *Modified Cellulosics*, Academic Press, New York, 1978; M. Levin and S. Sello, Eds., *Handbook of Fiber Science and Technology*, Vol. 2, Part A, Marcel Dekker, New York, 1984, pp. 1-318; and G. Hermanson, *Bioconjugate*
10 *Techniques*, Academic Press, San Diego, CA, 1996, pp. 169-297. The covalent crosslinks prevent the cellulose chains from slipping, thus imparting high durable press characteristics. However, the short and stiff crosslinks cause the cotton structure to become brittle and display poor tear strength. A variety of textile resins have been developed to crosslink cellulose and impart durable-press properties, such as polymethylol
15 compounds formed by the reaction of aldehydes with amines. They include melamineformaldehyde (British Patent Nos. 458,877, 466,015 and 468,677), dimethylolethyleneurea (U.S. Patent Nos. 2,416,046, 2,416,057, 2,425,627, 2,436,311, 2,373,136, and 2,899,263; and British Patent Nos. 603,160 and 577,735), and urons/triazones (U.S. Patent Nos. 2,373,135; and 2,321,989; British Patent Nos. 575,260
20 and 845,468; German Patent No. 1,123,334; *Angew. Chem.*, 60:267 (1948); *Am. Dyest. Rep.*, 48:44 (1959); and *Tex. Res J.*, 29:170 (1959).

 Dimethyloldihydroxyethyleneurea (DMDHEU) has been used in the production of durable-press garments. *Text. Res. J.*, 51:601 (1981). However, the DMDHEU system
25 retains chlorine and causes yellowing and tendering of the cloth; therefore it is not suitable for use with white cloth. Resins have been developed specifically for use with white cloth that are esters of carbamic acid (carbamates). U.S. Patent Nos. 3,639,455, and 4,156,784; Japanese Patent No. 599,505; British Patent Nos. 1,227,366, and 1,523,308; and French
Patent Nos. 1,576,067 and 7,532,092. The crosslinking of the cellulose and polymerization of the resin generally occurs at the same time on the fabric. U.S. Patent
30 Nos. 5,447,537, 4,975,209, 4,936,865, 4,820,307, and 3,995,998.

Methods for modifying materials with reactive groups such as hydroxyls and amines have been developed in the art, however, materials with hydroxyl groups, including polysaccharides such as cellulose, have been found to be difficult to covalently modify and therefore require reactive modifiers or extreme conditions. Methods of reacting with hydroxyls that have been developed in the chemistry field include the use of acid chlorides, anhydrides, succinimides, and carbonyldiimidazole. See, *e.g.*, J. March, "Advanced Organic Chemistry-Reactions, Mechanisms and Structure," 3rd Ed., John Wiley and Sons, New York, 1995; and G. Hermanson, "Bioconjugate Techniques," Academic Press, Inc., San Diego, 1996.

There is a need for methods for modifying various substrate materials, such as textile fibers of cotton or other cellulosic materials, wool, silk and other proteinaceous fibers, and various other natural, man made, regenerated and synthetic fiber materials to alter and optimize their properties for use in different applications. There is a need for methods for improving the properties of cloth or fabric materials containing various natural, man made, regenerated and/or synthetic fibers of various types, in order to improve various performance properties such as water resistance, soil resistance, speed of drying and permanent press properties. There further is a need for methods for producing modified textile fiber materials and other substrates which may be used in a wide range of applications including clothing and apparel fabrics, and various items of apparel, socks and hosiery, and fabrics for footwear and comfort and shoes, home furnishing fabrics for upholstery and window treatments including curtains and draperies, and fabrics for outdoor furniture and equipment, as well as for industrial textile end uses.

DISCLOSURE OF THE INVENTION

5 Provided are methods of modifying various substrate materials to alter the properties of the materials. Also provided are a variety of materials produced by the methods disclosed herein. In particular, compositions and methods are provided that permit the modification of a variety of textile fiber materials and similar substrates to alter properties including water repellency, grease repellency, soil resistance, oil or grease resistance, permanent press, detergent free washing, increased speed of drying, and improving strength and abrasion resistance, and to improve comfort, where such fibers are used alone, or in combinations or blends with one or more of the others before or after treatment.

10 In one embodiment, provided are methods of modifying a material to increase its hydrophobicity as well as a variety of products obtained using the methods. The material which is modified may comprise, for example, a carbohydrate or protein, and the modifiable functional groups on the material may comprise hydroxyls, or amino acid side chains.

15 In one embodiment, a method of modifying a textile material, for example, a cellulosic, such as cotton, or regenerated or man made cellulosic, or a synthetic polyamide such as nylon, or a natural polyamide, such as wool or a regenerated protein, is provided, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer comprises hydrophobic groups and hydrophilic groups. The multifunctional polymer may be attached to the material noncovalently via noncovalent interactions between the polymer and the material. The multifunctional polymer may comprise reactive groups, and thus may be attached to the material covalently by reaction of reactive groups on the polymer with reactive groups on the material. Reactive groups include amine, hydroxyl, carboxyl, amide, beta-ketoester, aldehyde, anhydride, acyl chloride, carboxylic acid hydrazide, oxirane, isocyanate, and methylolamide groups. The textile material may comprise, *e.g.*, a hydrophobic or hydrophilic surface.

25 The multifunctional polymer may be a copolymer comprising hydrophobic and hydrophilic regions. The multifunctional polymer may be formed, for example, by polymerization of hydrophobic monomers and hydrophilic monomers. In one embodiment,

the multifunctional polymer is a polysaccharide modified by the covalent attachment of a molecule comprising hydrophobic groups, or a poly(amino acid) modified by the covalent attachment of a molecule comprising hydrophobic groups. The multifunctional polymer may comprises a comb or graft copolymer, for example, with a hydrophobic synthetic
5 polymer backbone and hydrophilic groups grafted thereto. For example, the synthetic polymer backbone may comprise a polymer such as a polyester, polypropylene, polyethylene or copolymer thereof, and the grafted hydrophilic groups may comprise polypeptide or polysaccharide moieties.

A variety of multifunctional polymers are provided. The multifunctional polymer
10 may comprise a hydrophilic polymer comprising a plurality of reactive groups. In another embodiment, the multifunctional polymer may comprise polymerized monomers, such as 2-(acetoacetoxy)ethyl methacrylate, N-acroyloxysuccinimide, acrolein, acrylic anhydride, allylsuccinic anhydride, citraconic anhydride, 4,4'-hexafluoro-iso-propylidenebisphthalic anhydride, methacrylic anhydride, 4-methacryloxyethyl trimellitic anhydride, acryloyl
15 chloride, methacryloyl chloride, adipic acid dihydrazide, allyl glycidyl ether, glycidyl acrylate, glycidyl methacrylate, α,α -dimethyl-3-isopropenylbenzyl isocyanate, N-methylolacrylamide, and N-methylolmethacrylamide.

The multifunctional polymer may comprise a polymer such as a polyacetal, polyacrolein, poly(methyl isopropenyl ketone), poly(vinyl methyl ketone), poly(ethylene glycol) modified to comprise aldehyde groups, poly(ethylene glycol) modified to comprise
20 carbonyldiimidazole groups, poly(acrylic anhydride), poly(alkalene oxide/maleic anhydride) copolymers, poly(azelaic anhydride), poly(butadiene/maleic anhydride) copolymers, poly(ethylene/maleic anhydride) copolymers, poly(maleic anhydride), poly(maleic anhydride/1-octadecene) copolymers, poly(vinyl methyl ether/maleic
25 anhydride) copolymers, poly(styrene/maleic anhydride) copolymers, poly(acryloyl chloride), poly(methacryloyl chloride), chlorinated polydimethylsiloxane chlorinated polyethylene, chlorinated polyisoprene, chlorinated polypropylene, chlorinated poly(vinyl chloride), poly(ethylene glycol) modified to comprise epoxides, poly(ethylene glycol) modified to comprise isocyanate groups, poly(glycidyl methacrylate), poly(acrylic
30 hydrazide/methyl acrylate) copolymers, succinimidyl ester polymers, poly(ethylene glycol) modified to comprise succinimidyl ester groups, poly(ethylene glycol) modified to

comprise tresylate groups, and poly(ethylene glycol) modified to comprise vinyl sulfone groups.

In one embodiment, a method of modifying a material is provided, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer is capable of non-covalently or covalently binding the material, and wherein the multifunctional polymer is a modified poly(maleic anhydride) polymer. The multifunctional polymer may be attached to the material covalently via a reaction between functional groups on the polymer and the material, or noncovalently via noncovalent interactions between the polymer and the material.

The modified poly(maleic anhydride) polymer may comprise a poly(maleic anhydride) polymer modified by the covalent attachment of a hydrophobic molecule. In one embodiment, the modified poly(maleic anhydride) polymer comprises anhydride groups, and the polymer comprises hydroxyl or amino groups, and the polymer is attached to the material via the formation of ester or amide bonds between the polymer and the material.

The modified poly(maleic anhydride) polymer may be formed by the reaction of a poly(maleic anhydride) polymer comprising carboxy or anhydride groups with a hydrophobic molecule comprising a hydroxyl or amine group, thereby to attach the hydrophobic molecule to the poly(maleic anhydride) polymer via an ester or amide bond. The hydrophobic molecule may have, for example, the formula $R-X$, where R is a C₈-24 hydrocarbon or fluorocarbon, and X is OH or NH₂.

In one embodiment, the modified poly(maleic anhydride) is a copolymer of maleic anhydride and a polymerizable molecule, *e.g.*, vinyl, acrylate, methacrylate, styrene, alkyne, glycidyl acrylate, glycidyl methacrylate, vinyl ether (allyl), acrylamide and methacrylamide, comprising a hydrophobic group, for example, a hydroalkylalkene or a fluoroalkyl alkene. The modified poly(maleic anhydride) polymer may be formed by copolymerization of maleic anhydride and an alkene comprising a hydrophobic group, optionally followed by hydrolysis of anhydrides on the resulting polymer to form free carboxyl groups on the modified polymer. In another embodiment, the modified poly(maleic anhydride) polymer is a poly(maleic anhydride) polymer comprising covalently attached polyamide groups, such as nylon, wool or silk groups. In another

embodiment, the modified poly(maleic anhydride) polymer comprises a poly(maleic anhydride) polymer comprising covalently attached polysaccharide groups, such as dextran, starch or cellulose groups.

Also provided is a method of modifying a textile material, the method comprising attaching an upper critical solution temperature polymer to the material. The multifunctional polymer may be attached to the material noncovalently via noncovalent interactions between the polymer and the material, or the polymer may comprise reactive groups, and the polymer may be attached to the material covalently by reaction of reactive groups on the polymer with reactive groups on the material. Exemplary polymers include poly(ethylene oxide), alkylpoly(ethylene oxide), poly(propylene oxide), poly(vinyl methyl ether), hydroxypropyl acrylate, hydroxypropyl methylcellulose, hydroxypropyl cellulose, hydroxyethyl cellulose, methylcellulose, poly (vinyl alcohol), poly (N-substituted acrylamides), poly (N-acryloyl pyrrolidine), poly (N-acryloyl piperidine), poly (acryloyl-L-amino acid esters), poly(ethyl oxazoline), poly (methacrylic acid), and copolymers and triblock polymers thereof.

The methods disclosed herein may be used to modify various substrate materials, such as textile fibers of cotton or other cellulosic materials, wool, silk and other proteinaceous fibers, and various other natural, regenerated and synthetic fiber materials to alter and optimize their properties for use in different applications. Materials containing various natural, man made and/or synthetic fibers in the form of yarn, cloth or fabric of various types may be modified, in order to improve various performance properties such as water resistance, soil resistance, oil or grease resistance, speed of drying and such permanent press properties as smoothness or wrinkle resistance, and "wash and wear".

Materials comprising cellulose may be modified and are described by way of example. A variety of other materials, such as leather, other polysaccharides or polyamines, also may be modified, for example, to improve their hydrophobicity by the covalent attachment of hydrophobic groups. Cellulose containing materials which may be modified include cotton materials and various types of regenerated cellulose, such as rayon, including viscose rayon and lyocell and other natural celluloses such as linen, ramie and the like, in fiber, yarn or fabric form, which may be either undyed or dyed prior to the modification. Hydrophobic cellulosic material can be modified with attached hydrophobic

groups to improve properties of the cellulosic substrate such as water resistance and permanent press properties. Proteinaceous fibers including silk, wool, camel's hair, alpaca and other animal hairs and furs and regenerated protein fibers may be modified, as well as synthetic fibers including polyamides, such as nylon 6 and 66, various polyesters including polyethylene glycol terephthalate and derivatives thereof, and polytrimethylene terephthalate and other synthetic fibers. Various ones of these types of fibers also can be blended with one or more of the others, before or after treatment, *e.g.*, cotton and/or rayon and polyester, or wool and polyester, together, or with silk, linen or rayon added. The modified materials obtained as disclosed herein may be used in a variety of applications, such as the fabrication of clothing and various items of wearing apparel, socks, hosiery, footwear, and shoes, home furnishing fabrics including upholstery and window treatments including curtains and draperies, and fabrics for outdoor furniture and equipment, as well as for other industrial textile end uses.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a material comprising surface poly(amino acids) or cellulose modified by the non-covalent attachment of a hydrophobically modified hydrophilic polymer, such as a carbohydrate, a protein, polyacrylic acid, or poly(maleic anhydride).

Figure 2 is a scheme showing the covalent attachment of hydro and/or fluoro alkyl groups to a poly(maleic anhydride) polymer followed by covalent attachment of the polymer to a cotton surface.

Figure 3 is a scheme showing the copolymerization of maleic anhydride and hydro and/or fluoro vinyl alkyls to form a copolymer followed by covalent attachment of the copolymer to a cotton surface.

Figure 4 is a scheme showing the covalent attachment of hydro and/or fluoro alkyl groups to a poly(maleic anhydride) polymer followed by non-covalent attachment of the polymer to a cotton surface.

Figure 5 is a scheme showing the copolymerization of maleic anhydride and hydro and/or fluoro vinyl alkyls to form a copolymer followed by non-covalent attachment of the copolymer to a cotton surface.

Figure 6 is a scheme showing the covalent attachment of hydro and/or fluoro vinyl alkyl groups to a poly(maleic anhydride) polymer followed by covalent attachment of the polymer to a wool surface.

Figure 7 is a scheme showing the copolymerization of maleic anhydride and hydro and/or fluoro vinyl alkyls to form a copolymer followed by covalent attachment of the copolymer to a wool surface.

Figure 8 is a scheme showing the covalent attachment of hydro and/or fluoro vinyl alkyl groups to a poly(maleic anhydride) polymer followed by non-covalent attachment of the polymer to a wool surface.

Figure 9 is a scheme showing the copolymerization of maleic anhydride and hydro and/or fluoro vinyl alkyls to form a copolymer followed by non-covalent attachment of the copolymer to a wool surface.

Figure 10 is a scheme showing the grafting of a crystallizable moiety, such as a hydrocarbon polymer, to a poly(maleic anhydride) polymer followed by covalent attachment of the polymer to a cotton or wool surface.

Figure 11 is a scheme showing the copolymerization of maleic anhydride and a polymerizable compound comprising a crystallizable moiety to form a copolymer followed by covalent attachment of the copolymer to a cotton or wool surface.

Figure 12 is a scheme showing the grafting of a crystallizable moiety, such as a hydrocarbon polymer, to a poly(maleic anhydride) polymer followed by non-covalent attachment of the polymer to a cotton or wool surface.

Figure 13 is a scheme showing the copolymerization of maleic anhydride and a polymerizable compound comprising a crystallizable moiety to form a copolymer followed by non-covalent attachment of the copolymer to a cotton or wool surface.

Figure 14 is a scheme showing the reaction of a poly(maleic anhydride) polymer with the amine ends of nylon followed by the covalent attachment of the polymer to a cotton surface.

Figure 15 is a scheme showing the reaction of a poly(maleic anhydride) polymer with the amine ends of nylon followed by the non-covalent attachment of the polymer to a cotton surface.

Figure 16 is a scheme showing the reaction of a poly(maleic anhydride) polymer with the amine ends of nylon followed by the covalent attachment of the polymer to a wool surface.

Figure 17 is a scheme showing the reaction of a poly(maleic anhydride) polymer with the amine ends of nylon followed by the non-covalent attachment of the polymer to a wool surface.

Figure 18 is a scheme showing the reaction of a poly(maleic anhydride) polymer with a carbohydrate followed by the covalent attachment of the polymer to a nylon surface.

Figure 19 is a scheme showing the reaction of a poly(maleic anhydride) polymer with a carbohydrate followed by the non-covalent attachment of the polymer to a nylon surface.

Figure 20 is a scheme showing the reaction of a poly(maleic anhydride) polymer with a carbohydrate followed by the covalent attachment of the polymer to a wool surface.

Figure 21 is a scheme showing the reaction of a poly(maleic anhydride) polymer with a carbohydrate followed by the non-covalent attachment of the polymer to a wool surface.

MODES FOR CARRYING OUT THE INVENTION

Methods and compounds for modifying materials, as well as modified materials produced by the methods are provided. Using the methods disclosed herein, a variety of materials including textiles, such as cellulosic textile materials, including cotton fibers, as well as fibers of proteinaceous materials such as wool and silk, and synthetic fiber materials, such as nylon, and various man made materials, such as regenerated cellulose or regenerated protein, are modified to impart selected properties on or to the material. Desirable properties that can be imparted on or to the modified materials include water repellency, durability to dry cleaning and laundering, detergent free washing, increased speed of drying, resistance to abrasion and soiling, grease resistance, increased strength, and enhanced comfort.

Materials

A variety of materials, including textile fibers, yarns and fabrics can be modified as disclosed herein. The materials can be modified in one embodiment by the covalent or noncovalent attachment of certain polymers to the material. In one embodiment, materials comprising modifiable functional groups may be modified, by the covalent attachment of a multifunctional polymer. The modifiable functional groups in the materials are, for example, reactive groups capable of covalently reacting to attach the multifunctional polymer to the material. Exemplary modifiable functional groups include amine groups, hydroxyl groups, thiol groups, and carboxylic acid groups. The modifiable functional groups also can permit the modification by non-covalent attachment of certain polymers or monomers, for example, by hydrogen bonding interactions, hydrophobic interactions, or salt bridging.

Exemplary materials that can be modified as disclosed herein include carbohydrates, such as polysaccharides, and leather. Exemplary polysaccharides include dextran, cellulose or starch. Other exemplary materials include natural materials, such as wool or silk, as well as fibers of synthetic polymers such as polyamines and polyamides, e.g., nylon. Man made materials may be modified such as regenerated cellulose and viscose rayon, and regenerated proteins, and various cellulose derivatives. Other synthetic polymer materials also may be modified, such as polyesters, polyethers, polyacrylics and modified acrylics, polyurethanes and combinations thereof with other monomers and polymers.

In one embodiment, materials comprising amino acids, for example in the form of poly(amino acids), may be modified. For example, in one embodiment, wool and silk materials comprising proteins may be modified as disclosed herein.


Cellulosic Materials

In one embodiment, a variety of cellulose containing materials may be modified as disclosed herein. Exemplary materials include textile fabrics for clothing and apparel, paper materials, such as filters, and other materials such as chromatography materials. For example, cotton fibers or cloth comprising such fibers may be modified.

In one embodiment, cellulose containing materials, such as cotton, are modified, for example, by the attachment of a multifunctional polymer. The modification of cotton

material can alter properties of the cotton, such as its water/soil repellent characteristics, or permanent press properties. Advantageously, the cotton containing materials may be modified after procedures such as dyeing of the cotton. The cotton material may be also provided as a blend with other natural and/or synthetic materials, either before or after the modification step wherein, for example, the hydrophobic groups are covalently attached.

Cellulose is a mostly linear polymer of glucose connected by β -1,4-linkages as shown below:

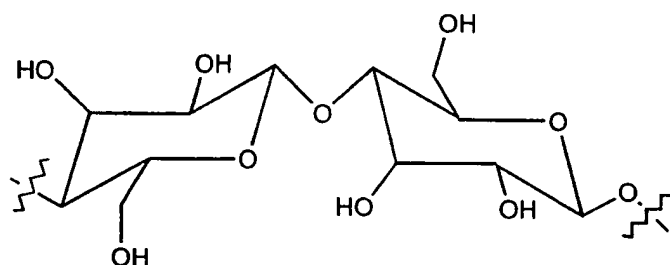

Each strand of natural cellulose is from 2000 to 3000 anhydro glucose units long. The cellulose polymers are easily hydrolyzed by acid. The cellulose molecules form fibrils in which the majority of the molecules are oriented in the direction of the fiber axis, giving the fiber its strength. Between the crystalline regions are semicrystalline and amorphous areas. The configuration of the fiber is stabilized by hydrogen bonds and van der Waals forces.

In cellulose, each glucose unit contains three hydroxyl groups which gives cellulose its hydrophilic characteristics. Using the methods disclosed herein, these hydroxyl groups may be chemically modified to alter its properties. For example, the hydroxyl groups may be modified by the attachment of multifunctional polymers comprising hydrophobic groups, such as hydrocarbon and fluorocarbon groups, to impart hydrophobic characteristics to the cellulose, and consequently, to materials, such as clothing made from the cotton.

Amino Acid Containing Materials

5 In one embodiment, materials comprising poly(amino acids), such as proteins, may be modified as disclosed herein. For example, wool materials may be modified. Wool materials, for example, may comprise a protein such as keratin, which may be modified as disclosed herein.

Materials comprising amino acids, for example comprising proteins, may be modified as disclosed herein, for example, by modification of substituents on the amino acid side chains. For example, the hydroxyl on serine, threonine, or tyrosine may be modified. The side chain on lysine, arginine and histidine may be modified. The
10 carboxylic acid group on aspartate and glutamate may be modified. The amide group on asparagine and glutamine may be modified, as well as the thiol group on cysteine. Modification can occur, for example, by the covalent or non-covalent attachment of polymers that alter properties of the material as disclosed herein.

A variety of materials with modifiable functional groups, such as thiol, amine and
15 hydroxyl, may be modified as disclosed herein. While, in one embodiment, the modification is described in detail herein with respect to cellulose by way of example, other materials including hydroxyl or other modifiable groups may be modified by the methods disclosed herein.

Multifunctional Molecules

20 Multifunctional molecules for use in modifying the surfaces of materials such as textile fibers, including cotton, wool and nylon, are provided. In one embodiment, multifunctional polymers are provided. The term "multifunctional polymer" as used herein, refers to polymers with plural functional groups or regions, such as binding groups, hydrophobic groups, and hydrophilic groups and oleophobic groups. The multifunctional
25 polymers can include hydrophobic regions and/or hydrophilic regions. The multifunctional polymers also may include binding functional groups that permit either non-covalent or covalent binding to the material being treated, thus permitting the multifunctional polymer to form a non-covalent or covalent coating on the material. For example, the binding functional groups may be capable of associating with the surface via hydrogen bonds, van
30 der Waals, ionic, and/or hydrophobic, or other non-covalent interactions between the coating molecule and the surface being coated. The binding groups also may be reactive

groups that are capable of reacting with functional groups on the surface to form a covalent bond between the coating molecule and the surface.

Modification Using Activated Acyl Groups

5 A variety of hydrophobic groups may be attached to materials. In one embodiment, a material comprising a modifiable functional group, such as cellulose, is reacted with one or more activated acyl groups, for example, in the presence of a hindered base. While cellulose is discussed herein by way of example, other materials, including other polysaccharides, may be modified as disclosed herein, as well as materials containing amines.

10 For example, the activated acyl group may be an acid chloride or anhydride. Exemplary compounds are shown in Scheme I below. For example, the activated acyl group may be an acid chloride, RCOCl or anhydride $(\text{RCO})_2\text{O}$. Mixed anhydrides also may be used. The R group may be selected to determine the properties of the cellulose, after acylation. R in one embodiment is a cyclic or branched or straight chain hydrocarbon or fluorocarbon.

The activated acyl group may be an acyl chloride, RCOCl or anhydride $(\text{RCO})_2\text{O}$, wherein R is a C5 to C20 saturated or unsaturated branched, cyclic or straight chain hydrocarbon, for example a straight chain C10-20 saturated hydrocarbon, such as hexadecanoyl chloride. For more hydrophobicity, longer chain lengths may be used.

20 In another embodiment, polymeric molecules, e.g., polyethylene acid chloride, maleic acid or polypropylene maleic acid chloride may be used. Exemplary polymeric activated acyl groups which can be used are shown in Formulas 1, 2 and 3 below, wherein m, n, o and p are independently about 10 to 10,000, preferably about 100-10,000. The molecules of Formulas 2 and 3 are multifunctional and can attach at multiple sites on the cellulose, and can form "loops" and "trains" respectively on the cellulose.


25 In another embodiment the activated acyl group may be an acid chloride, $\text{R}(\text{CH}_2)_2\text{COCl}$ or anhydride, $(\text{R}(\text{CH}_2)_2\text{CO})_2\text{O}$, wherein R is a C1-C12 branched, cyclic or straight chain fluorocarbon. For example, R may be CF_3 -. In another embodiment, R can be $\text{CF}_3(\text{CF}_2)_n$ - wherein n is, for example, 0 to 10 (as shown in Formula 4 in Scheme I below). Fluorinated chains are generally more hydrophobic than hydrocarbon chains of the same length, so shorter chains may be used. For example, cellulose may be rendered

30


hydrophobic by reaction with the activated hydrophobic acyl group,
 $\text{CF}_3(\text{CF}_2)_2(\text{CH}_2)_2\text{COCl}$. Mixtures of hydrocarbons and fluorocarbons can be used.

Exemplary acid chlorides or anhydrides which may be used to treat a material, such as cellulose or other carbohydrate material, in the presence of a hindered base are shown in Scheme I below.


5




Formula 1




Formula 2

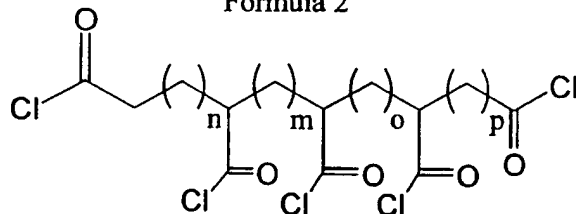


Formula 3



Hexadecanoyl chloride



Formula 4



Acetyl chloride

Scheme I

*Multifunctional Polymers Including Hydrophobic Groups and Hydrophilic Groups
 for Coating Hydrophilic Surfaces Non-Covalently*

In one embodiment multifunctional polymers are provided that include hydrophobic groups and hydrophilic groups. These multifunctional polymers may be used, for example, to form hydrophobic water repellent coatings non-covalently on surfaces, such as hydrophilic surfaces of materials, such as cellulose materials, including cotton. This permits the synthesis of durable water resistant coatings on materials, such as cotton, without the need for covalent chemical reactions. Durable non-covalent coatings may be formed via a large number of weak interactions, *i.e.*, hydrogen bonds, van der Waals, ionic, and hydrophobic interactions, between the coating molecule and the surface being coated.

The multifunctional polymers may include hydrophilic functional groups that are capable of interacting with the hydrophilic surface, for example, of cotton fabric, as well as hydrophobic functional groups capable of repelling water. Exemplary polymers including both types of functional groups include graft copolymers and block copolymers containing hydrophilic and hydrophobic regions. Weber *et al.*, Eds. *Solvents and Self Organization of Polymers*, Kluwer Academic, Dordrecht, The Netherlands, 1996.

For example, a graft copolymer, in one embodiment, includes a main polymer backbone consisting of one polymerized monomer with a second monomer type grafted and polymerized onto the backbone. The synthesis of a graft copolymer in one embodiment involves the formation of a reactive center on the polymer backbone molecule in the presence of a polymerizable monomer. Most methods of synthesizing graft copolymers involve the use of radical and ionic polymerization. In a preferred embodiment, a graft copolymer is provided that consists of a hydrophilic backbone with hydrophobic polymer grafts. The graft copolymer is applied to the materials, such as cotton fabric (a hydrophilic surface) to produce a durable hydrophilic coating.

Once adsorbed to the hydrophilic surface, the polymer will minimize its energy by orienting its hydrophilic backbone towards the hydrophilic cotton surface (noncovalent binding) with the alkyl groups (the hydrophobic grafts) oriented away from the surface (water/soil repellency). Thus, a durable, noncovalently attached water repellent coating is formed. If fluorinated hydrophobic monomers are used, an oil repellent finish is also produced. Examples of hydrophilic and hydrophobic monomers are listed in Table I, below. Many of these monomers are commercially available, for example from Polysciences, Inc., Warrington, PA.

Hydrophobic Monomers

- 5 N-(*tert*-Butyl)acrylamide
n-Decyl acrylamide
n-Decyl methacrylate
N-Dodecylmethacrylamide
2-Ethylhexyl acrylate
1-Hexadecyl methacrylate
10 n-Myristyl acrylate
N-(n-Octadecyl) acrylamide
n-Octadecyltriethoxysilane
N-*tert*-Octylacrylate
Stearyl acrylate
Stearyl methacrylate
15 Vinyl laurate
Vinyl stearate

Hydrophobic Monomers - Fluorinated

- 20 1H,1H,7H-Dodecafluoroheptyl methacrylate
2-Fluorostyrene
4-Fluorostyrene
1H,1H,2H,2H-Heptadecafluorodecyl acrylate
1H,1H,2H,2H-Heptadecafluorodecyl methacrylate
25 1H,1H-Heptafluorobutyl acrylate
1H,1H-Heptafluorobutyl methacrylate
1H,1H,4H-Hexafluorobutyl acrylate
1H,1H,4H-Hexafluorobutyl methacrylate
Hexafluoro-iso-propyl acrylate
Methacryloyl fluoride
30 1H,1H-Pentadecafluorooctyl acrylate
1H,1H-Pentadecafluorooctyl methacrylate
Pentafluorophenyl acrylate
Pentafluorophenyl methacrylate
2,3,4,5,6-Pentafluorostyrene
35 1H,1H,3H-Tetrafluoropropyl acrylate
1H,1H,3H-Tetrafluoropropyl methacrylate
2,2,2-Trifluoroethyl acrylate
2,2,2-Trifluoroethyl methacrylate

40 Hydrophilic Monomers

- Acrylamide
Acrylic acid
N-Acryloyltris(hydroxymethyl)methylamine
Bisacrylamidoacetic acid

Glycerol mono(meth)acrylate
 4-Hydroxybutyl methacrylate
 2-Hydroxyethyl acrylate
 2-Hydroxyethyl methacrylate (glycol methacrylate)
 N-(2-Hydroxypropyl)methacrylamide
 N-Methacryloyltris(hydroxymethyl)methylamine
 N-Methylmethacrylamide
 Poly(ethylene glycol) (n) monomethacrylate
 Poly(ethylene glycol) (n) monomethyl ether monomethacrylate
 2-Sulfoethyl methacrylate
 1,1,1-Trimethylolpropane monoallyl ether
 N-Vinyl-2-pyrrolidone (1-vinyl-2-pyrrolidinone)

TABLE I

Other hydrophobic monomers include perfluoroalkyl monofunctional vinyl ethers, such as those available from Allied Signal (Morristown, NJ) and perfluoroalkyl sulfonamide acrylates and methacrylates (3M, St. Paul, MN).

The multifunctional polymers also may comprise natural polymers. Carbohydrates, such as dextran, starch, and cellulose, are natural, hydrophilic polymers composed of hydroxyl group-containing glucose units.

Using the methods disclosed herein, in one embodiment, hydrophobic/oleophobic groups, such as palmitoyl chloride, may be grafted onto some of the hydroxyl groups, for example, one per anhydroglucose unit, to produce a carbohydrate with groups capable of hydrogen bonding (hydroxyl groups) and groups capable of repelling water/soil (*e.g.*, palmityl groups) – an amphiphilic polymer. Additionally, the free hydroxyl groups can be replaced with groups capable of forming stronger hydrogen bonds to the cotton surface, such as carboxylates, amines, and sulfonates, and therefore produce a more durable coating. For example, free hydroxyl groups can be converted to carboxylates with reagents such as chloroacetic acid or succinic anhydride, converted to amines by caprolactam, or converted to sulfonates with sulfuryl chloride. Other reactions include reaction of hydroxyl groups on carbohydrates to add hydrophobicity, by, for example: the addition of alkyl halides or alkyl epoxides; activation with chloroacetic acid followed by reaction with a nucleophilic alkyl, such as an alkyl amine, alkyl alcohol, or alkyl thiol, in the presence of a catalyst, such as dicyclohexylcarbodiimide (DCC); activation with carbonyl diimidazole followed by

reaction with a nucleophilic alkyl; reaction with acetyl chlorides, such as palmitoyl chloride or with alkyl anhydrides; activation with oxidizing agents to produce a dialdehyde followed by reaction with an alkyl amine or hydrazide; and activation with epichlorohydrin followed by reaction with a nucleophilic alkyl.

5 Block copolymers also may be used, wherein the block copolymer includes two polymers, and wherein blocks of one type of homopolymer are attached to blocks of another type of homopolymer. By alternating sequences of hydrophobic blocks with hydrophilic blocks, a block copolymer with amphiphilic character is formed. The copolymer can be adsorbed to the hydrophilic surface of materials such as wool and cotton.
10 Once adsorbed, the polymer will take the form of loops on the surface with the hydrophilic polymer adsorbed to the surface and the hydrophobic blocks oriented away from the surface as loops to impart a durable and hydrophobic finish. Examples of hydrophobic and hydrophilic monomers that may be used are listed in Table I. R.J. Ceresa, Eds., *Block and Graft Copolymerization*, John Wiley and Sons, New York, 1973.

15 Hydrophobic monomers may be grafted to hydrophilic polymers by polymerizing the hydrophobic monomers to reactive groups, such as end groups, on hydrophilic polymers. The monomers also may be reacted in succession to produce block copolymers. Hydrophobic polymer chains may be grown on an activated hydrophilic polymer. For example, poly(2-hydroxyethyl methacrylate) and acryloyl chloride may be reacted to form
20 an acrylate-activated moiety. This acrylate moiety may be reacted with stearyl acrylate to produce a graft-(stearylacrylate)2-hydroxyethylmethacrylate.

 The multifunctional polymers may be used to coat a variety of materials as disclosed herein including cotton as well as natural or synthetic poly(amides). In one embodiment, materials comprising amino acids, such as a wool material, comprising a
25 protein such as keratin, may be modified. A multifunctional polymer comprising a poly(amino acid) modified to contain hydrophobic groups may be used to coat materials such as a protein containing material. The hydrophobically modified poly(amino acid) is applied to the material to which it associates via hydrogen bonding interactions between the poly(amino acid) portion of the hydrophobically modified poly(amino acid) and the
30 poly(amino acid) in the material, such as wool. Figure 1 shows one embodiment wherein a material comprising surface poly(amino acids) 10 is bound by hydrogen bonding

interactions with the hydrophobically modified poly(amino acid) 40 that includes a poly(amino acid) chain 20 and covalently attached hydrophobic chains 30. The hydrophobic chains may be, for example, hydrocarbon or fluorocarbon chains, and may be, for example, straight, branched, or cyclic.

5 The hydrophobic groups, such as linear, branched, or cyclic hydro or fluorocarbon groups, may be conveniently attached to poly(amino acids), for example by coupling to the amine group of lysine. Amines of lysines may react with isothiocyanates, isocyanates, acylazides, N-hydroxysuccinimide esters, sulfonylchloroaldehydes and glyoxals, epoxides and oxiranes, carbonates, arylating reagents, imidoesters, carbodiimides, anhydrides and acid
10 chlorides, as described, for example, in G.T. Hermanson, "Bioconjugate Techniques", Academic Press, San Diego, CA, 1996, pp. 137-146.

Multifunctional Polymers Including Hydrophobic Groups and Hydrophilic Groups for Coating Hydrophobic Surfaces Non-Covalently

15 The multifunctional polymers, conversely, also may be used to form hydrophilic coatings non-covalently on hydrophobic surfaces of materials. The non-covalent coatings thus may be used to give the materials more comfortable wear properties, and enhance durability. Non-covalent hydrophilic coatings may be formed on a variety of hydrophobic materials, such as materials comprising polyesters, or polyamides including nylon. Other examples of materials include polyolefins, acrylates, polyacrylics and polyurethanes.

20 The non-covalent coatings can form on the surface via weak interactions, such as, hydrogen bonds, van der Waals, ionic, and hydrophobic interactions, between the coating molecule(s) and the surface. Typically the multifunctional polymers include hydrophilic groups and hydrophobic functional groups that are capable of interacting with the hydrophobic surface, for example, of a polyamide such as nylon. Exemplary polymers
25 including hydrophobic groups and hydrophilic groups are described in detail above. For example, graft copolymers, as discussed above, may be used.

30 Once adsorbed to the hydrophobic surface, the polymer will minimize its energy by orienting its hydrophobic portion(s) towards the hydrophobic surface, by non-covalent binding, and with the hydrophilic portion(s) oriented away from the surface. Thus, a durable, non-covalently attached hydrophilic coating is formed. Examples of hydrophilic

and hydrophobic monomers are listed in Table I, above. Many of these monomers are commercially available, for example from Polysciences, Inc., Warrington, PA.

In one embodiment, block copolymers also may be used that include hydrophobic blocks and hydrophilic blocks. The copolymer can be adsorbed to the hydrophobic surface of materials such as nylon. Once adsorbed, the polymer will take the form of loops on the surface with the hydrophobic polymer adsorbed to the surface and the hydrophilic blocks oriented away from the surface as loops to impart a durable and hydrophilic finish.

Examples of hydrophobic and hydrophilic monomers that may be used are listed in Table I. R.J. Ceresa, Eds., *Block and Graft Copolymerization*, John Wiley and Sons, New York, 1973.

The multifunctional polymer used to form the non-covalent coating may comprise, for example, a hydrophobically modified poly(amino acid) that is applied to the material to which it associates via bonding interactions between the hydrophobic portion of the hydrophobically modified poly(amino acid) and the hydrophobic surface. The hydrophobic chains may be, for example, hydrocarbon or fluorocarbon chains, and may be, for example, straight, branched, or cyclic.

Comb or graft copolymers may be used. In one embodiment, a graft copolymer may be used that includes a synthetic backbone, *e.g.*, a polyester, polypropylene, polyethylene or polypropylene/polyethylene copolymer, to which are grafted hydrophilic portions, such as silk-like polypeptides or polysaccharide moieties such as dextran or cellulose chains or branches. The resulting polymer can be used to coat materials such as polyesters or polypropylene to give them more comfortable wear properties and enhance durability. Other materials include polyamides, polyurethanes and polyolefins.

Multifunctional Polymers Including Reactive Groups for Covalent Attachment to Surfaces

Multifunctional molecules, such as multifunctional polymers, also are provided that include one or more reactive groups and optionally hydrophobic and/or hydrophilic groups. Certain hydrophilic groups, such as carboxyl groups, may also function as reactive groups. The multifunctional polymers including reactive groups may be covalently attached to the surface of materials, such as wool or cotton, to modify properties of the material, for example, to impart wrinkle resistance and permanent press properties to the materials.

In one embodiment, the multifunctional polymers are block copolymers or graft copolymers including reactive groups, for example, cellulose (hydroxyl) or amino acid reactive functional groups at one or both ends of the polymer, or spaced along the polymer backbone. Exemplary monomers and polymers including reactive groups are shown in Table II below. Exemplary reactive functional groups and their reactions with carbohydrates also are described in G. T. Hermanson, *Bioconjugate Techniques*, Academic Press, San Diego, CA, 1996, pp. 27-40, the disclosure of which is incorporated herein. In one embodiment, carbohydrate (cellulose) reactive monomers are reacted with carbohydrate (cellulose) unreactive monomers, for example as listed in Table I, to produce a multifunctional polymer that is a copolymer with the desired density of crosslinking sites on the copolymer. The multifunctional polymer also may be a cellulose reactive polymer as shown below. The multifunctional polymers may be used to covalently coat a variety of materials, including cotton, as well as materials containing amino acids and proteins, such as wool.

The attached multifunctional polymers can, for example, impart wrinkle resistance by crosslinking the cellulose chains of cotton to prevent slippage and to increase the crystallinity of the cotton through attractive interactions (van der Waals) between the polymer chains grafted on the fabric. The loss in tear strength due to rigidification that results in commercial crosslinking processes is avoided due to the spring-like nature of the polymer chains which allow stretching without loss of cellulose conformation. The polymer also can mask the properties of the fabric, thus providing useful surface characteristics such as water resistance and soil repellency.

The multifunctional polymer may comprise a hydrophobic region and a reactive group; a hydrophilic region and a reactive group; or combinations thereof. For example, the polymer may include plural different hydrophilic or plural different hydrophobic regions and one or more reactive groups, or may include combinations of hydrophobic and hydrophilic regions in addition to one or more reactive groups. The multifunctional polymer in one embodiment is a hydrophilic polymer comprising a plurality of reactive groups. For example, the amylose fraction of starch has a helical conformation (A.L. Lehninger, *Biochemistry*, Worth, New York, 1970, p. 229) and may be used to form

spring-like crosslinks. Similarly, polymers such as peptides, including natural or synthetic polymers, with a flexible secondary structure can be used.

A list of exemplary cellulose reactive monomers and polymers is provided below in Table II. These monomers and polymers are also useful with a variety of other materials, such as wool.

Cellulose Reactive Monomers

Beta-Ketoester

2-(Acetoacetoxy)ethyl methacrylate

Activated Ester

N-Acrolyloxysuccinimide

Aldehyde

Acrolein

Carboxylic Acid Anhydrides

Acrylic anhydride

Allylsuccinic anhydride

Citraconic anhydride

4,4'-Hexafluoro-iso-propylidenebisphthalic anhydride

Methacrylic anhydride

4-Methacryloxyethyl trimellitic anhydride

Carboxylic Acid Chloride

Acryloyl chloride

Methacryloyl chloride

Carboxylic Acid Hydrazide

Adipic acid dihydrazide

Oxiranes

Allyl glycidyl ether

Glycidyl acrylate

Glycidyl methacrylate

Isocyanate

Alpha, alpha-dimethyl-3-isopropenylzyl isocyanate

Methylolamides

N-Methylolacrylamide

N-Methylolmethacrylamide

Cellulose Reactive Polymers

Aldehyde and Ketone-Functional Polymers

Polyacetal

Polyacrolein

Poly(methyl isopropenyl ketone)

Poly(vinyl methyl ketone)

Poly(ethylene glycol) -aldehyde terminated

	Carbonylimidazole Activated Polymers
	Poly(ethylene glycol) – carbonyldiimidazole terminated
	Carboxylic Acid Anhydride-Functional Polymers
	Poly(acrylic anhydride)
5	Poly(alkylene oxide/maleic anhydride) copolymers
	Poly(maleic anhydride)
	Poly(butadiene/maleic anhydride) copolymer
	Poly(ethylene/maleic anhydride) copolymer
	Poly(maleic anhydride)
10	Poly(maleic anhydride/1-octadecene) copolymer
	Poly(vinyl methyl ether/maleic anhydride) copolymer
	Poly(styrene/maleic anhydride) copolymer
	Carboxylic Acid Chloride-Functional Polymers
	Poly(acryloyl chloride)
15	Poly(methacryloyl chloride)
	Chlorinated Polymers
	Polydimethylsiloxane – chlorine terminated
	Polyethylene – chlorinated
	Polyisoprene – chlorinated
20	Polypropylene – chlorinated
	Poly(vinyl chloride)
	Epoxy-Terminated Polymers
	Poly(ethylene glycol) – epoxide terminated
	Isocyanate-Terminated Polymers
25	Poly(ethylene glycol) - isocyanate terminated
	Oxirane Functional Polymers
	Poly(glycidyl methacrylate)
	Hydrazide-Functional Polymers
	Poly(acrylic hydrazide/methyl acrylate) copolymer
30	Succinimidyl Ester Polymers
	Poly(ethylene glycol) - succinimidyl ester terminated
	Tresylate-Activated Polymers
	Poly(ethylene glycol) - tresylate terminated
	Vinyl Sulfone-Terminated Polymers
35	Poly(ethylene glycol) – vinyl sulfone terminated

TABLE II

Examples of the use of Multifunctional Polymers for Non-Covalent and Covalent Attachment to a Material to Impart Selected Properties to the Material


A variety of multifunctional polymers may be non-covalent or covalently attached to a material to impart a selected property to the material. In one embodiment, the multifunctional polymer is a polymer comprising a plurality of reactive groups, such as a poly(carboxylic acid) molecule or poly(anhydride) molecule. The polymer may be formed, for example, from a polyanhydride, such as poly(maleic anhydride), or from polymerization of monomers such as maleic anhydride, or monomers from Table II.

In one embodiment, a method of modifying a material is provided, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer is capable of non-covalently or covalently binding the material, and wherein the multifunctional polymer is a modified poly(maleic anhydride) polymer. As used herein, the term "modified poly(maleic anhydride) polymer" refers to a polymer of maleic anhydride that has been modified covalently, for example, to include hydrophobic groups, or oleophobic groups. Modified poly(maleic anhydride) polymers include copolymers, including block and graft copolymers, of maleic anhydride. The multifunctional polymer may be attached to the material covalently via a reaction between functional groups on the polymer and the material, or noncovalently via noncovalent interactions between the polymer and the material.

The modified poly(maleic anhydride) polymer may comprise a poly(maleic anhydride) polymer partially modified by the covalent attachment of a hydrophobic molecule. In one embodiment, the modified poly(maleic anhydride) polymer comprises anhydride groups, and the polymer is attached to the material via the formation of ester or amide bonds between the anhydride groups of the polymer and hydroxyl or amine groups on the material.

The modified poly(maleic anhydride) polymer may be formed by the reaction of a poly(maleic anhydride) polymer comprising carboxy or anhydride groups with a hydrophobic molecule comprising a hydroxyl or amine group, thereby to attach the hydrophobic molecule to the poly(maleic anhydride) polymer via an ester or amide bond. The hydrophobic molecule may, for example, have the formula R-X, where R is a C₈-24 hydrocarbon or fluorocarbon, and X is OH, NH₂ or SH.

One embodiment of a molecule that may be attached to poly(maleic anhydride) polymers is a compound of Formula V, shown below:



5

Formula V

In the compound of Formula V, for example:

m is 0 or 1;

10

n is 0 or 1;

o is 0 to 2;

A is $-\text{SO}_2-$, $-\text{CONH}-$, $-\text{CH}_2-$ or CF_2- ;

R is a linear, branched, or cyclic hydrocarbon or fluorocarbon, including fully or partially fluorinated hydrocarbons, wherein R may be, for example, a C_1 to C_{30}


15

hydrocarbon or fluorocarbon; and

X is a nucleophilic group capable of reacting with an anhydride, such as hydroxyl, amine or thiol.

In one embodiment, the modified poly(maleic anhydride) is a copolymer of maleic anhydride and a polymerizable molecule. For example, maleic anhydride may be copolymerized with a compound of Formula VI, below:

20



Formula VI

5 In the compound of Formula VI, for example:

m is 0 or 1;

n is 0 or 1;

o is 0 to 2;

A is -SO₂-, -CONH-, -CH₂- or CF₂-;

10 R is a linear, branched, or cyclic hydrocarbon or fluorocarbon, including fully or partially fluorinated hydrocarbons, wherein R may be, for example, a C₁ to C₃₀ hydrocarbon or fluorocarbon; and

15 X is a polymerizable group capable of copolymerizing with maleic anhydride, for example, vinyl, acrylate, methacrylate, styrenyl, alkene, glycidyl acrylate, glycidyl methacrylate, vinyl ether (allyl), acrylamide, or methacrylamide.

In one example, the modified poly(maleic anhydride) polymer is a copolymer of maleic anhydride and a molecule R-X, wherein R is a C₁-C₃₀, for example, a C₈-C₂₄ hydrocarbon or fluorocarbon, and X is polymerizable moiety, such as an unsaturated group, for example, an alkene.

20 In one embodiment, the modified poly(maleic anhydride) may be a copolymer of maleic anhydride and an alkene comprising a hydrophobic group, such as a hydroalkylalkene or a fluoroalkyl alkene. The modified poly(maleic anhydride) polymer may be formed by copolymerization of maleic anhydride and an alkene comprising a hydrophobic group, followed by hydrolysis of anhydrides on the resulting polymer to form
25 free carboxyl groups on the modified polymer. In another embodiment, the modified poly(maleic anhydride) polymer is a poly(maleic anhydride) polymer comprising

covalently attached polyamide groups, such as nylon groups. In another embodiment, the modified poly(maleic anhydride) polymer comprises a poly(maleic anhydride) polymer comprising covalently attached polysaccharide groups, such as dextran, starch or cellulose groups.

5 Chemically modified poly(maleic anhydrides), such as poly(carboxylic acid) polymers, may be used in one embodiment to impart selected properties, such as water, oil, grease, or soil repellency, wrinkle resistance, smoothness and other permanent press properties, increased strength, and/or abrasion resistance, and to improve comfort of materials such as cotton and wool, or to impart a natural, cotton-like feel to materials such
10 as nylon or other synthetic fibers, e.g., polyesters, and to wool or silk. The polymer may be attached to the materials, for example, via the formation of ester bonds to materials such as cotton, or, e.g., the formation of amide bonds to materials such as wool, silk and nylon. In another embodiment, a poly(carboxylic acid) polymer formed for example from poly(maleic anhydride) may be attached non-covalently to materials such as cotton, wool,
15 silk and nylon via weak physical attraction, for example via hydrogen bonding, between the carboxylic acids of the multifunctional polymer to groups on surfaces of materials such as cotton, wool, silk and nylon. Poly(maleic anhydride) based polymers are advantageous due to the ease of reaction and the low cost of poly(maleic anhydride).

Use of a Poly(Carboxylic Acid) to form a Water or Soil Repellent Polymer Coating

20 A multifunctional polymer, such as a poly(carboxylic acid) may be used, for example, to form a water or soil repellent finish or coating on fibers or fabric of materials such as cotton and wool. The multifunctional polymer may be attached to the material through covalent bonds, such as ester or amide bonds after reformation of the anhydride with sodium hypophosphite, or physically through many weak forces, such as hydrogen
25 bonds, or electrostatic interactions.

In one embodiment, the multifunctional polymer comprises a poly(carboxylic acid) to which are attached hydrophobic groups, such as hydroalkyls or fluoroalkyls. The poly(carboxylic acid) may be formed from poly(maleic anhydride) modified with hydrocarbon and/or fluorocarbon hydrophobic moieties.

30 One embodiment is shown in Figure 2. In Figure 2, m, n and o are, for example, independently about 1 to 10,000, e.g., about 1 to 1000. For example, m is about 1 to 1000,

and n and o are about 1 to 800. The ratio of o:n is, for example, about 1:1 to 25:1, for example about 10:1. Poly(maleic anhydride) is partially reacted with hydro- and fluoroalkanols, or, for example, compounds of Formula V, above, to form a polymer containing both textile reactive (maleic anhydride) and hydro/oleophobic groups (hydro- and fluoroesters). This compound is then covalently bound to a material such as cotton yarn or fabric using suitable reaction conditions, such as an aqueous solution containing the polymer and a sodium hypophosphite catalyst. These reaction conditions are described for example in: Welch, *Rev. Prog. Coloration*, Vol. 22, 1992, pp. 32-41; and Lammermann, *Melliand English*, Vol. 3, 1992, pp. E105-E107, the disclosures of which are incorporated herein by reference. In the Figures, the total number of m, n and o subunits can be arranged in any order in the polymer.

In another embodiment, a copolymer is formed from maleic anhydride and hydro- and fluoroalkenes, or compounds of Formula VI above, as shown in Figure 3. In Figure 3, m and n are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000, and the n:m ratio is for example, about 1:1 to 25:1, *e.g.*, about 10:1. The copolymerized polymer can have, for example, about 1 to 1000 of the maleic anhydride-co-fluoroalkene-co-hydroalkene units. The resulting polymer, poly(maleic anhydride-co-fluoroalkene-co-hydroalkene), is covalently bound to cotton fiber or fabric under the conditions described above for the method shown in Figure 2.

Since wool also contains functional groups, such as serine hydroxyls and lysine amines, capable of reacting with maleic anhydride, the above polymers may be covalently bound in a similar fashion to impart water/soil repellency to wool fibers and fabric, as shown in Figures 6 and 7. In Figures 6 and 7, m, n and o are for example independently about 1 to 10,000, or *e.g.*, about 1 to 1000. Thus the number of units n and o in the alkylated polymer can be for example independently about 1 to 1000. In one embodiment, m is about 1 to 1000, n is about 1 to 800 and o is about 1 to 800. The ratio of o:n is, for example, about 1:1 to 25:1, *e.g.*, about 10:1.

To produce a water/soil repellent, non-covalently bound coating on materials such as cotton, hydrogen bonds are formed between the multifunctional polymer coating and the material. In the embodiment shown in Figure 4, poly(maleic anhydride) is reacted, for example, completely, with hydro- and fluoroalkanols, for example, as described above, to

form an amphiphilic multifunctional polymer containing both carboxylic acids, capable of hydrogen bonding to cotton, and hydro/oleophobic groups for water/soil repellency. The compound is then applied to cotton fibers or clothing from an aqueous solution where the carboxylates hydrogen bond to the cotton hydroxyls. No catalyst is needed. In Figure 4, m is for example about 1 to 10,000, or *e.g.*, about 1 to 1000.

In another embodiment, maleic anhydride and hydro- and fluoroalkenes, as described above, are copolymerized. The resulting polymer, poly(maleic anhydride-co-fluoroalkene-co-hydroalkene), is hydrolyzed in water to give carboxylates which subsequently hydrogen bond to cotton hydroxyls. This method is illustrated in Figure 5. In Figure 5, m and n are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000. The ratio of n:m is, for example, about 1:1 to 25:1, *e.g.*, about 10:1. The copolymerized polymer can have, for example, about 1 to 1000 of the maleic anhydride-co-fluoroalkene-co-hydroalkene units.

Since wool also contains functional groups, such as serine hydroxyls, and lysine amines, capable of forming hydrogen bonds to carboxylates, the above polymers may be applied in a similar manner to impart water/soil repellency to wool fibers and fabric, as shown in Figures 8 and 9. In Figure 8, m is for example, about 1 to 10,000, or *e.g.*, about 1 to 1000. In Figure 9, m and n are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000, and the n:m ratio is for example, about 1:1 to 25:1, *e.g.*, about 10:1. The copolymerized polymer can have, for example, about 1 to 10,000, or *e.g.*, about 1 to 1000 of the maleic anhydride-co-fluoroalkene-co-hydroalkene units.

Use of a Poly(Carboxylic Acid) to form a Permanent Press Coating

In one embodiment, to crosslink cotton to produce a permanent press finish, a multifunctional polymer is provided that includes a plurality of carboxylic groups and one or more crystallizable moieties. The multifunctional polymer can be formed, for example, by attaching crystallizable groups to a poly(maleic anhydride) backbone. The maleic anhydride can be covalently linked to the material or hydrolyzed to form a dicarboxylic acid which can hydrogen bond to the material. The crystallizable moiety, *e.g.*, polymers of hydrocarbons, provide the stiff scaffolding on the surface of the fabric, similar to common starch/ironing treatments, to maintain durable press characteristics. Unlike the starch

treatment, the coating is covalently or non-covalently bound to the material and insoluble in water.

In one embodiment, to produce a durable press, covalently-bound finish on cotton, the cotton-binding moiety (maleic anhydride) is combined with a crystallizable moiety (polymers of hydrocarbons). This may be accomplished, for example, as shown in Figure 10. Poly(maleic anhydride) is partially reacted with poly(hydroalkanols) to form a polymer containing both cotton reactive (maleic anhydride) and crystallizable groups (poly(hydroalkylesters)). This compound is then covalently bound to the cotton yarn or fabric using reaction conditions similar to the formation of durable press cotton with poly(carboxylic acids) (an aqueous solution containing the polymer and sodium hypophosphite catalyst). In Figure 10, m, n and o are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000. For example, m is about 1 to 1000, and n and o are about 1 to 800. The ratio of n:o can be, for example, about 1:50 to 1:0.02, *e.g.*, 1:1. In the alkylated polymer, for example, there can be for example independently about 1 to 10,000, or, *e.g.*, about 1 to 1000 of the n and o subunits.

Another embodiment is shown in Figure 11, wherein a copolymer is formed from maleic anhydride and poly(hydroalkenes). The resulting polymer, poly(maleic anhydride-co-polyhydroalkene), is covalently bound to cotton fiber or fabric under identical conditions to the first method presented above. In Figure 11, m and n are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000, and the n:m ratio is for example, about 1:50 to 1:0.02, *e.g.*, 1:1. The copolymerized polymer can have, for example, about 1 to 1000 of the maleic anhydride-co-fluoroalkene-co-hydroalkene units.

Since wool also contains functional groups (serine hydroxyls, lysine amines, etc) capable of reacting with maleic anhydride, the above polymers may be applied in a similar fashion to impart durable press properties to wool fiber yarns and/or fabric.

To produce a durable press, non-covalently bound finish on textiles, in one embodiment, hydrogen bonds are formed between the multifunctional polymer and the cotton. In one embodiment, shown in Figure 12, poly(maleic anhydride) is reacted, for example, completely, with poly(hydroalkanols), as described above, to form an amphiphilic polymer containing both carboxylic acids (capable of hydrogen bonding to textiles) and crystallizable groups for durable press properties. The compound is then applied to cotton

fibers, yarn, apparel fabric or clothing from an aqueous solution where the carboxylates hydrogen bond to the cotton hydroxyls. No catalyst is needed. In Figure 12, m is, for example about 1 to 10,000, or *e.g.*, about 1 to 1000.

In another embodiment, shown in Figure 13, maleic anhydride and
5 poly(hydroalkenes) as described above are copolymerized. The resulting polymer, poly(maleic anhydride-co-polyhydroalkene), is hydrolyzed in water to give carboxylates which subsequently hydrogen bond to cotton hydroxyls. In Figure 13, m and n are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000, and the n:m ratio is for example about 1:50 to 1:0.02, *e.g.*, 1:1. The copolymerized polymer can have, for
10 example, about 1 to 1000 of the maleic anhydride-co-fluoroalkene-co-hydroalkene units.

Since wool also contains functional groups (serine hydroxyls, lysine amines, etc) capable of forming hydrogen bonds to carboxylates, the above polymers may be applied in a similar fashion to impart durable press properties to wool fibers and fabric.

Use of a Poly(Carboxylic Acid) to Form an Abrasion Resistant Coating

15 Compared to synthetic fabrics such as polyester and nylon, cotton and wool have relatively low abrasion resistance. However, synthetic fabrics are not as comfortable to wear as cotton or wool. Therefore, combining the best attributes of each fabric type would be beneficial. To improve the abrasion resistance of cotton and wool, in one embodiment, a multifunctional polymer comprising a highly abrasion resistant molecule, such as nylon,
20 is used to coat the surface of the fabric.

To produce an abrasion resistant, covalently-bound finish on cotton, in one embodiment, poly(maleic anhydride) is partially reacted with the amines of nylon to form a polymer containing both cotton reactive (maleic anhydride) and abrasion resistant groups (nylon), as shown in Figure 14. This multifunctional polymer then is covalently bound to
25 the cotton yarn or fabric using reaction conditions similar to the formation of durable press cotton with poly(carboxylic acids) (an aqueous solution containing the polymer and sodium hypophosphite catalyst). In Figure 14, m, n and o are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000. For example, m is about 1 to 1000, and n and o are about 1 to 800. In the nylon treated polymer, for example, there can be for example independently
30 about 1 to 10,000, or, *e.g.*, about 1 to 1000 of the n and o subunits. The ratio of n:o is, for example, about 1:50 to 50:1, *e.g.*, 1:1.

Since wool also contains functional groups, such as serine hydroxyls, and lysine amines, capable of reacting with maleic anhydride, the above polymers may be covalently bound in a similar fashion to impart abrasion resistant properties to wool fibers and fabric, as shown in Figure 16. In Figure 16, m, n and o are, for example, independently about 1 to 10,000, e.g., about 1 to 1000. For example, m is about 1 to 1000, and n and o are about 1 to 800. In the nylon treated polymer, for example, there can be for example independently about 1 to 10,000, or, e.g., about 1 to 1000 of the n and o subunits. The ration of n:o is, for example, about 1:50 to 50:1, e.g., 1:1.

To produce an abrasion resistant, non-covalently bound finish on cotton, hydrogen bonds are formed between the abrasion resistant multifunctional polymer and the cotton, as shown in Figure 15. In Figure 15, m is, for example about 1 to 10,000, or e.g., about 1 to 1000. Poly(maleic anhydride) is reacted, for example, completely, with the amines of nylon to form a polymer containing both carboxylic acids, capable of hydrogen bonding to textiles, and abrasion resistant groups. The compound is then hydrogen bonded to cotton fibers or clothing from an aqueous solution. No catalyst is needed.

Since wool also contains functional groups, such as serine hydroxyls and lysine amines, capable of forming hydrogen bonds to carboxylates, the above polymers may be physically bound in a similar fashion to impart abrasion resistance to wool fibers and fabric, as shown in Figure 17. In Figure 17, m is, for example about 1 to 10,000, or e.g., about 1 to 1000.

Use of a Poly(Carboxylic Acid) to Form a Natural Coating for Nylon and Wool

Compared to soft and comfortable fabrics such as cotton and rayon (composed of carbohydrates), nylon and wool sometimes feel uncomfortable against the skin. Therefore, giving nylon and wool the feel of cotton would be beneficial. To improve the feel of nylon and wool, multifunctional polymers comprising a comfortable molecule, carbohydrate, may be used to coat the surface of the fabric.

To produce a comfortable, covalently-bound finish on nylon, a multifunctional polymer is used that includes binding groups such as anhydride groups as well as carbohydrate groups, such as dextran, starch, or cellulose. In one embodiment, as shown in Figure 18, poly(maleic anhydride) is partially reacted with the hydroxyls of carbohydrates, such as dextran, starch or cellulose, to form a polymer containing both nylon reactive

(maleic anhydride) and comfort groups (carbohydrates). This multifunctional polymer then is covalently bound to nylon fibers or fabric using reaction conditions similar to the formation of durable press cotton with poly(carboxylic acids) (an aqueous solution containing the polymer and sodium hypophosphite catalyst). In Figure 18, m, n and o are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000. For example, m is about 1 to 1000, and n and o are about 1 to 800. In the carbohydrate reacted polymer, for example, there can be for example independently about 1 to 10,000, or, *e.g.*, about 1 to 1000 of the n and o subunits. The ratio of n:o is for example about 50:1 to 1:50, *e.g.*, 1:1.

Since wool also contains functional groups, such as serine hydroxyls and lysine amines, capable of reacting with maleic anhydride, the above polymers may be covalently bound in a similar fashion to impart comfort properties to wool fibers and fabric, as shown in Figure 20. In Figure 20, m, n and o are, for example, independently about 1 to 10,000, *e.g.*, about 1 to 1000. For example, m is about 1 to 1000, and n and o are about 1 to 800. In the carbohydrate reacted polymer, for example, there can be, for example, independently about 1 to 10,000, or, *e.g.*, about 1 to 1000 of the n and o subunits. The ratio of n:o is, for example, about 1:50 to 50:1, *e.g.*, 1:1.

To produce a comfortable, non-covalently bound coating on nylon, hydrogen bonds are formed between the multifunctional polymer and nylon, as shown in Figure 19. In Figure 19, m is, for example about 1 to 10,000, or *e.g.*, about 1 to 1000. Poly(maleic anhydride) is, for example, completely reacted with the hydroxyls of carbohydrates to form a polymer containing both carboxylic acids, capable on hydrogen bonding to nylon, and comfort groups. The polymer then is non-covalently physically bound to nylon fibers or fabric from an aqueous solution where the carboxylates hydrogen bond to the nylon amines. No catalyst is needed.

Since wool also contains functional groups (serine hydroxyls, lysine amines, etc) capable of forming hydrogen bonds to carboxylates, the above polymers may be physically bound in a similar fashion to impart comfort qualities to wool fibers and fabric, as shown in Figure 21. In Figure 21, m is, for example about 1 to 10,000, or *e.g.*, about 1 to 1000.

Smart Polymers

In one embodiment, smart polymers may be covalently or noncovalently attached to materials such as cotton or wool. Such coatings are useful, for example, to impart quick drying properties on the materials.

5 Natural cotton is very hydrophilic and tends to bind water quite strongly. Therefore, a large amount of heat is required to remove water from a cotton garment. Vast amounts of energy are used worldwide each year in this drying process. Use of garments that require less drying time would result in significant global energy savings. Methods are advantageously provided that permit a significant reduction in the amount of time required
10 to dry fabric.

 In one embodiment, an upper critical solution temperature polymer, referred to as a smart or intelligent polymer is covalently attached to materials including cellulose materials, such as cotton. Such polymers are described, for example, in S.L. Rosen, *Fundamental Principles of Polymeric Materials*, John Wiley and Sons, Inc, New York,
15 1993, Chapter VII; and A.S. Hoffman, *Macromol. Symp.* 98:645-664 (1995). A smart polymer will respond to a small physical or chemical stimuli, such as pH, temperature, ions, solvents, and electric fields, with a large property change, such as phase, shape, optics, mechanics, surface energies, and permeation rate. A smart polymer that is relatively hydrophilic at room temperature in water and air can be covalently attached to a cellulose
20 material, such as cotton fabric, for example to form a coating on the fabric. Upon raising the temperature, for example, in a clothes dryer, the polymer undergoes a phase transition to a hydrophobic state, thus liberating trapped water molecules within the fabric coating and reducing drying time. The temperature of the phase change depends on the molecular weight of the polymer and the interaction between the polymer, fabric, and water. Table III
25 lists examples of polymers that display a lower critical solution temperature (LCST) in aqueous solutions useful for this application. Exemplary polymers include poly(ethylene oxide) (PEO), polypropylene oxide (PPO) polymers and copolymers.

 Bifunctional compounds capable of crosslinking the smart polymers to cotton or wool can be used to covalently attach the polymer to the fabric. Possible crosslinkers
30 include epichlorohydrin, glutaraldehyde, disuccinimidyl glutarate, glyoxal, carbonyl diamidazole, DMDHEU, and formaldehyde.

	Ether Groups
	Poly (ethylene oxide) (PEO)
	Poly (ethylene oxide/propylene oxide) copolymers
5	PEO/PPO/PEO triblock polymers
	Alkyl-PEO block polymers
	Poly (Vinyl methyl ether)
	Alcohol Groups
	Hydroxypropyl acrylate
10	Hydroxypropyl methylcellulose
	Hydroxypropyl cellulose
	Hydroxyethyl cellulose
	Methylcellulose
	Poly (vinyl alcohol) and derivatives
15	Substituted Amide Groups
	Poly (N-substituted acrylamides)
	Poly (N-acryloyl pyrrolidine)
	Poly (N-acryloyl piperidine)
	Poly (acryloyl-L-amino acid esters)
20	Poly (ethyl oxazoline)
	Other
	Poly (methacrylic acid)

TABLE III

25

In another embodiment, a smart polymer that is a solid in air and a liquid in water or at basic pH may be covalently attached to a material such as a cellulose material such as cotton fabric using methods as described above. Thus, the fabric will release soils when placed in an aqueous detergent wash solution. Examples of such polymers include the hydrogels, as described, for example in D. DeRoss *et al.*, Eds., *Polymer Gels*, Plenum Press, New York, 1991.

30

Covalent Attachment of Low Surface Energy Monomers and Polymers

35

Increasing the abrasion resistance of fabric can dramatically increase its useful lifetime. In one embodiment, materials such as cellulose materials, such as cotton fabric may be coated by covalent attachment of low surface energy monomers or polymers, such as fluorocarbons, and high performance engineered polymers such as nylon and polyamides, to reduce friction, as disclosed herein. This coating thus protects the garment

from wear and increases its durability characteristics. The polymers may be attached to cellulosic materials via the crosslinkers disclosed herein.

Applications

Water repellency is imparted by lowering the surface energy of the material, such as cotton fabric, below the surface tension of water, thus causing water to bead on the fabric. The formation of water repellent coatings is particularly useful for the production of water repellent outerwear, such as cotton or wool outerwear. The cotton or wool advantageously retains its breathability, flexibility and softness after modification. The hydrophobically modified material, such as cotton is useful in that it can be made in vibrant and varied colors and patterns, and is light weight, and comfortable. Cotton also is advantageous in that it is natural and inexpensive. Cotton and wool materials may be easily mass produced inexpensively and in a variety of colors, patterns and shades, with good and permanent water repellency. Water repellent characteristics are imparted on materials, such as cotton-containing materials, by attaching multifunctional molecules directly to the material.

Grease repellency properties may be imparted on a material, such as cotton or wool. In grease repellent materials, the surface energy of the materials must be reduced below that of grease. Typically, grease is a hydrocarbon having a surface tension similar to that of a hydrocarbon coating. Fluorocarbons are among the lowest surface energy substances known. Bain et al., *J. Am. Chem. Soc.*, 111:7155 (1989). When attached to materials such as fabric, multifunctional molecules comprising fluorocarbon moieties will sufficiently lower the energy of the fabric to produce grease and water repellency.

When cotton fabric is immersed in water or heated, the weak forces (hydrogen bonds and van der Waals attractions) that hold the cellulose chains in place break and the chains become free to move. Upon drying and cooling, the chains freeze into whatever position they happen to be in. This physical process is known as wrinkling. Cotton materials may be modified to improve their permanent press properties, with minimal loss of performance properties such as strength and abrasion resistance. Wool can wrinkle in a similar matter. Multifunctional molecules may be attached to materials, such as cotton or wool, to enhance the permanent press character, while retaining many attributes associated

with the original natural fibers. The extent of modification will determine the durability of permanent press.

5 A variety of materials can be modified as disclosed herein, including various textile fiber materials in a variety of forms, such as fabric, yarn, and thread or finished articles of apparel or home furnishings fabrics. The surfaces of a variety of materials can be modified to alter properties, such as hydrophobicity. The surface of these filters, paper or wood, including wood furniture, and upholstery fabric can be treated as disclosed herein. The modified materials, such as cellulose cotton materials, or cotton containing materials, as well as wool, or other fibers, alone or blended with one or more other fibers produced as described herein may be used to form a variety of articles. For example, a variety of clothing and apparel items may be produced using the cotton cellulose materials, such as cloth or fabric for various end uses, including shirts, pants, bathing suits, jackets and shoes. 10 A variety of articles of furniture may be produced including outdoor furniture or furniture coverings. Other items include furniture upholstery, curtains, and bedding items, and bedsheets or bedspreads and comforters, as well as pillows or pillow coverings, and floor coverings such as carpets, area rugs, throw rugs and mats of various types. Articles for outdoor use may be produced including car upholstery and paneling or furniture coverings, air filters such as automobile air filters, tents, umbrellas, and beach equipment. 15

20

CLAIMS

What is claimed is:

1. A method of modifying a textile material, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer comprises hydrophobic groups and hydrophilic groups.
2. The method of claim 1, wherein the method comprises attaching the multifunctional polymer to the material noncovalently via noncovalent interactions between the polymer and the material.
3. The method of claim 1, wherein the multifunctional polymer comprises reactive groups, and wherein method comprises attaching the multifunctional polymer to the material covalently by reaction of reactive groups on the polymer with reactive groups on the material.
4. The method of claim 1, wherein the textile material comprises a material selected from the group consisting of cotton, nylon and wool.
5. The method of claim 1, wherein the textile material comprises a hydrophobic or hydrophilic surface.
6. The method of claim 1, wherein the polymer is a copolymer comprising hydrophobic and hydrophilic regions.
7. The method of claim 6, wherein the polymer is formed by polymerization of hydrophobic monomers and hydrophilic monomers.
8. The method of claim 7, wherein the hydrophobic monomers are selected from the group consisting of N-(*tert*-butyl)acrylamide, n-decyl acrylamide, n-decyl methacrylate, N-dodecylmethacrylamide, 2-ethylhexyl acrylate, 1-hexadecyl methacrylate, n-myristyl acrylate, N-(n-octadecyl) acrylamide, n-octadecyltriethoxysilane, N-*tert*-octylacrylate, stearyl acrylate, stearyl methacrylate, vinyl laurate, vinyl stearate, fluoroacrylates, and fluorostyrenes; and wherein the hydrophilic monomers are selected from the group consisting of hydrophilic monomers, acrylamide, acrylic acid, N-acryloyltris(hydroxymethyl)methylamine, bisacrylamidoacetic acid, glycerol mono(meth)acrylate, 4-hydroxybutyl methacrylate, 2-hydroxyethyl acrylate, 2-hydroxyethyl methacrylate (glycol methacrylate), N-(2-hydroxypropyl)methacrylamide, N-

methacryloyltris(hydroxymethyl)methylamine, N-methylmethacrylamide, poly(ethylene glycol) (n) monomethacrylate, poly(ethylene glycol) (n) monomethyl ether monomethacrylate, 2-sulfoethyl methacrylate, 1,1,1-trimethylolpropane monoallyl ether, N-vinyl-2-pyrrolidone (1-vinyl-2-pyrrolidinone), and 2-hydroxyethylmethacrylate.

5 9. The method of claim 1, wherein the multifunctional polymer is a polysaccharide modified by the covalent attachment of a molecule comprising hydrophobic groups.

10 10. The method of claim 1, wherein the multifunctional polymer comprises a poly(amino acid) modified by the covalent attachment of a molecule comprising hydrophobic groups.

11. The method of claim 1, wherein the multifunctional polymer comprises a comb or graft copolymer.

12. The method of claim 11, wherein the polymer comprises a hydrophobic synthetic polymer backbone and hydrophilic groups grafted thereto.

15 13. The method of claim 12, wherein the synthetic polymer backbone comprises a polymer selected from the group consisting of a polyester, polypropylene, polyethylene or copolymer thereof, and wherein the grafted hydrophilic groups comprise polypeptide or polysaccharide moieties.

20 14. The method of claim 3, wherein the reactive groups are amine, hydroxyl, carboxyl, amide, beta-ketoester, aldehyde, anhydride, acyl chloride, carboxylic acid hydrazide, oxirane, isocyanate, or methylolamide groups.

15. The method of claim 3, wherein the multifunctional polymer comprises a hydrophilic polymer comprising a plurality of reactive groups.

25 16. The method of claim 3, wherein the multifunctional polymer comprises polymerized monomers selected from the group consisting of 2-(acetoacetoxy)ethyl methacrylate, N-acroyloxysuccinimide, acrolein, acrylic anhydride, allylsuccinic anhydride, citraconic anhydride, 4,4'-hexafluoro-iso-propylidenebisphthalic anhydride, methacrylic anhydride, 4-methacryloxyethyl trimellitic anhydride, acryloyl chloride, methacryloyl chloride, adipic acid dihydrazide, allyl glycidyl ether, glycidyl acrylate, 30 glycidyl methacrylate, α,α -dimethyl-3-isopropenylenzyl isocyanate, N-methylolacrylamide, and N-methylolmethacrylamide.

17. The method of claim 3, wherein the multifunctional polymer comprises a polymer selected from the group consisting of a polyacetal, polyacrolein, poly(methyl isopropenyl ketone), poly(vinyl methyl ketone), poly(ethylene glycol) modified to comprise aldehyde groups, poly(ethylene glycol) modified to comprise carbonyldiimidazole groups, poly(acrylic anhydride), poly(alkalene oxide/maleic anhydride) copolymers, poly(azelaic anhydride), poly(butadiene/maleic anhydride) copolymers, poly(ethylene/maleic anhydride) copolymers, poly(maleic anhydride), poly(maleic anhydride/1-octadecene) copolymers, poly(vinyl methyl ether/maleic anhydride) copolymers, poly(styrene/maleic anhydride) copolymers, poly(acryloyl chloride), poly(methacryloyl chloride), chlorinated polydimethylsiloxane chlorinated polyethylene, chlorinated polyisoprene, chlorinated polypropylene, chlorinated poly(vinyl chloride), poly(ethylene glycol) modified to comprise epoxides, poly(ethylene glycol) modified to comprise isocyanate groups, poly(glycidyl methacrylate), poly(acrylic hydrazide/methyl acrylate) copolymers, succinimidyl ester polymers, poly(ethylene glycol) modified to comprise succinimidyl ester groups, poly(ethylene glycol) modified to comprise tresylate groups, and poly(ethylene glycol) modified to comprise vinyl sulfone groups.

18. A method of modifying a material, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer is capable of non-covalently or covalently binding the material; and

wherein the multifunctional polymer is a modified poly(maleic anhydride) polymer.

19. The method of claim 18, wherein the multifunctional polymer is attached to the material covalently via a reaction between functional groups on the polymer and the material.

20. The method of claim 18, wherein the multifunctional polymer is attached to the material noncovalently via noncovalent interactions between the polymer and the material.

21. The method of claim 18, wherein the material is selected from cotton, nylon and wool.

22. The method of claim 18, wherein the modified poly(maleic anhydride) polymer comprises a poly(maleic anhydride) polymer modified by the covalent attachment of a hydrophobic molecule.

5 23. The method of claim 19, wherein the modified poly(maleic anhydride) polymer is attached to the material via the formation of ester or amide bonds between the polymer and the material.

24. The method of claim 22, wherein the modified poly(maleic anhydride) polymer comprises a poly(maleic anhydride) polymer attached to a hydrophobic molecule to the poly(maleic anhydride) polymer via an ester or amide bond.

10 25. The method of claim 24, wherein the hydrophobic molecule has the formula R-X, where R is a C8-C24 hydrocarbon or fluorocarbon, and X is OH, NH₂ or SH.

26. The method of claim 18, wherein the modified poly(maleic anhydride) polymer is a copolymer of maleic anhydride and an alkene comprising a hydrophobic group.

15 27. The method of claim 26, wherein the alkene is a hydroalkylalkene or a fluoralkyl alkene.

28. The method of claim 18, wherein the modified poly(maleic anhydride) polymer is a copolymer of maleic anhydride and a molecule R-X, wherein R is a C8-C24 hydrocarbon or fluorocarbon, and X is polymerizable moiety.

20 29. The method of claim 28, wherein the polymerizable moiety is an unsaturated group.

25 30. The method of claim 27, wherein the modified poly(maleic anhydride) polymer is formed by copolymerization of maleic anhydride and an alkene comprising a hydrophobic group, optionally followed by hydrolysis of anhydrides on the resulting polymer to form free carboxyl groups on the modified polymer.

31. The method of claim 18, wherein the modified poly(maleic anhydride) polymer comprises a poly(maleic anhydride) polymer comprising covalently attached polyamide groups.

32. The method of claim 31, wherein the polyamide groups are nylon groups.

33. The method of claim 32, wherein the material is cotton or wool, and wherein the attachment of the multifunctional polymer enhances the abrasion resistance of the material.

34. The method of claim 18, wherein the modified poly(maleic anhydride) polymer comprises a poly(maleic anhydride) polymer comprising covalently attached polysaccharide groups.

35. The method of claim 34, wherein the polysaccharide groups are dextran, starch or cellulose groups.

36. The method of claim 35, wherein the material is wool or nylon.

37. A method of modifying a textile material, the method comprising attaching an upper critical solution temperature polymer to the material.

38. The method of claim 37, wherein the method comprises attaching the polymer to the material noncovalently via noncovalent interactions between the polymer and the material.

39. The method of claim 37, wherein polymer comprises reactive groups, and wherein method comprises attaching the polymer to the material covalently by reaction of reactive groups on the polymer with reactive groups on the material.

40. The method of claim 37, wherein the polymer is selected from the group consisting of poly(ethylene oxide), alkylpoly(ethylene oxide), poly(propylene oxide), poly(vinyl methyl ether), hydroxypropyl acrylate, hydroxypropyl methylcellulose, hydroxypropyl cellulose, hydroxyethyl cellulose, methylcellulose, poly (vinyl alcohol), poly (N-substituted acrylamides), poly (N-acryloyl pyrrolidine), poly (N-acryloyl piperidine), poly (acryloyl-L-amino acid esters), poly(ethyl oxazoline), poly (methacrylic acid), and copolymers and triblock polymers thereof.

41. The method of claim 37, wherein the material comprises cotton or wool.

42. A material produced by the method of claim 1.

43. A material produced by the method of claim 18.

44. A material produced by the method of claim 36.

45. A material produced by the method of claim 37.

46. A modified cellulosic or polyamide material comprising a cellulosic or polyamide material having covalently bonded thereto a multifunctional molecule comprising hydrophobic groups and hydrophilic groups.

47. The modified material of claim 46, wherein the multifunctional polymer is formed by polymerization of hydrophobic monomers and hydrophilic monomers.

48. The modified material of claim 47, wherein hydrophobic monomers are selected from the group consisting of N-(*tert*-butyl)acrylamide, n-decyl acrylamide, n-decyl methacrylate, N-dodecylmethacrylamide, 2-ethylhexyl acrylate, 1-hexadecyl methacrylate, n-myristyl acrylate, N-(n-octadecyl) acrylamide, n-octadecyltriethoxysilane, N-*tert*-octylacrylate, stearyl acrylate, stearyl methacrylate, vinyl laurate, vinyl stearate, fluoroacrylates, and fluorostyrenes; and

wherein the hydrophilic monomers are selected from the group consisting of hydrophilic monomers, acrylamide, acrylic acid, N-acryloyltris(hydroxymethyl)methylamine, bisacrylamidoacetic acid, glycerol mono(meth)acrylate, 4-hydroxybutyl methacrylate, 2-hydroxyethyl acrylate, 2-hydroxyethyl methacrylate (glycol methacrylate), N-(2-hydroxypropyl)methacrylamide, N-methacryloyltris(hydroxymethyl)methylamine, N-methylmethacrylamide, poly(ethylene glycol) (n) monomethacrylate, poly(ethylene glycol) (n) monomethyl ether monomethacrylate, 2-sulfoethyl methacrylate, 1,1,1-trimethylolpropane monoallyl ether, N-vinyl-2-pyrrolidone (1-vinyl-2-pyrrolidinone), and 2-hydroxyethylmethacrylate.

49. The modified material of claim 46, wherein the multifunctional polymer is a polysaccharide modified by the covalent attachment of a molecule comprising hydrophobic groups.

50. The modified material of claim 46, wherein the multifunctional polymer comprises a poly(amino acid) modified by the covalent attachment of a molecule comprising hydrophobic groups.

51. The modified material of claim 46, wherein the multifunctional molecule comprises a poly(maleic anhydride) polymer comprising covalently attached hydrophilic or hydrophobic groups.

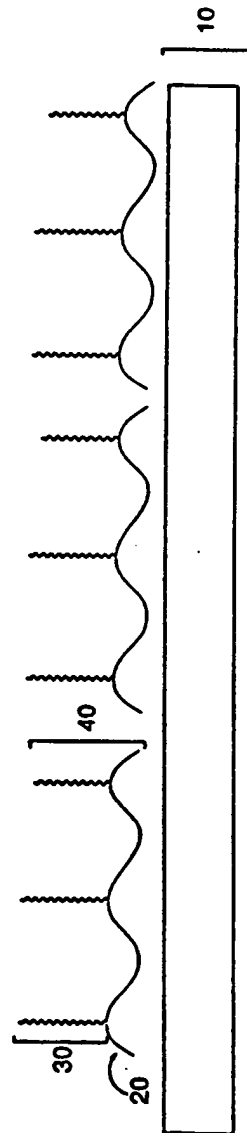


FIGURE 1

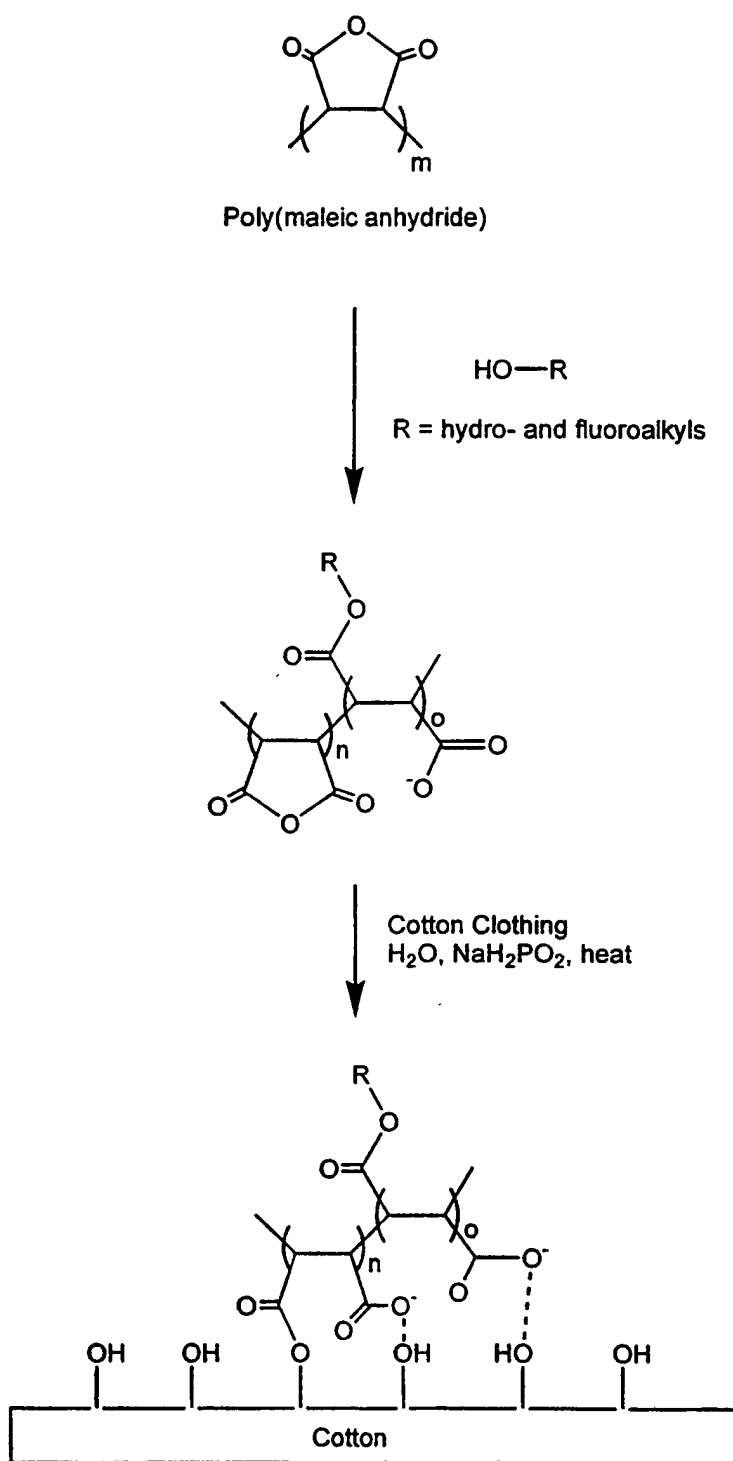


FIGURE 2

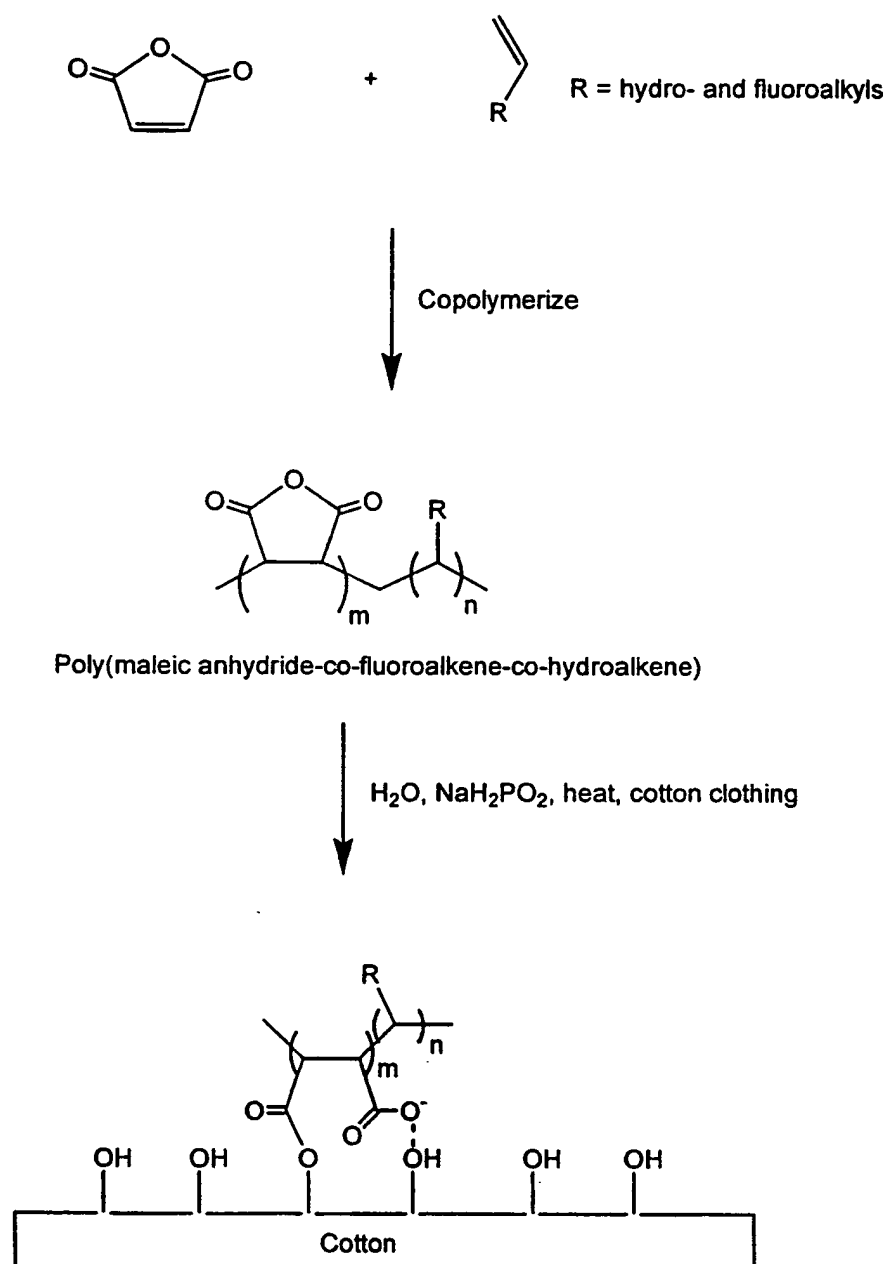


FIGURE 3

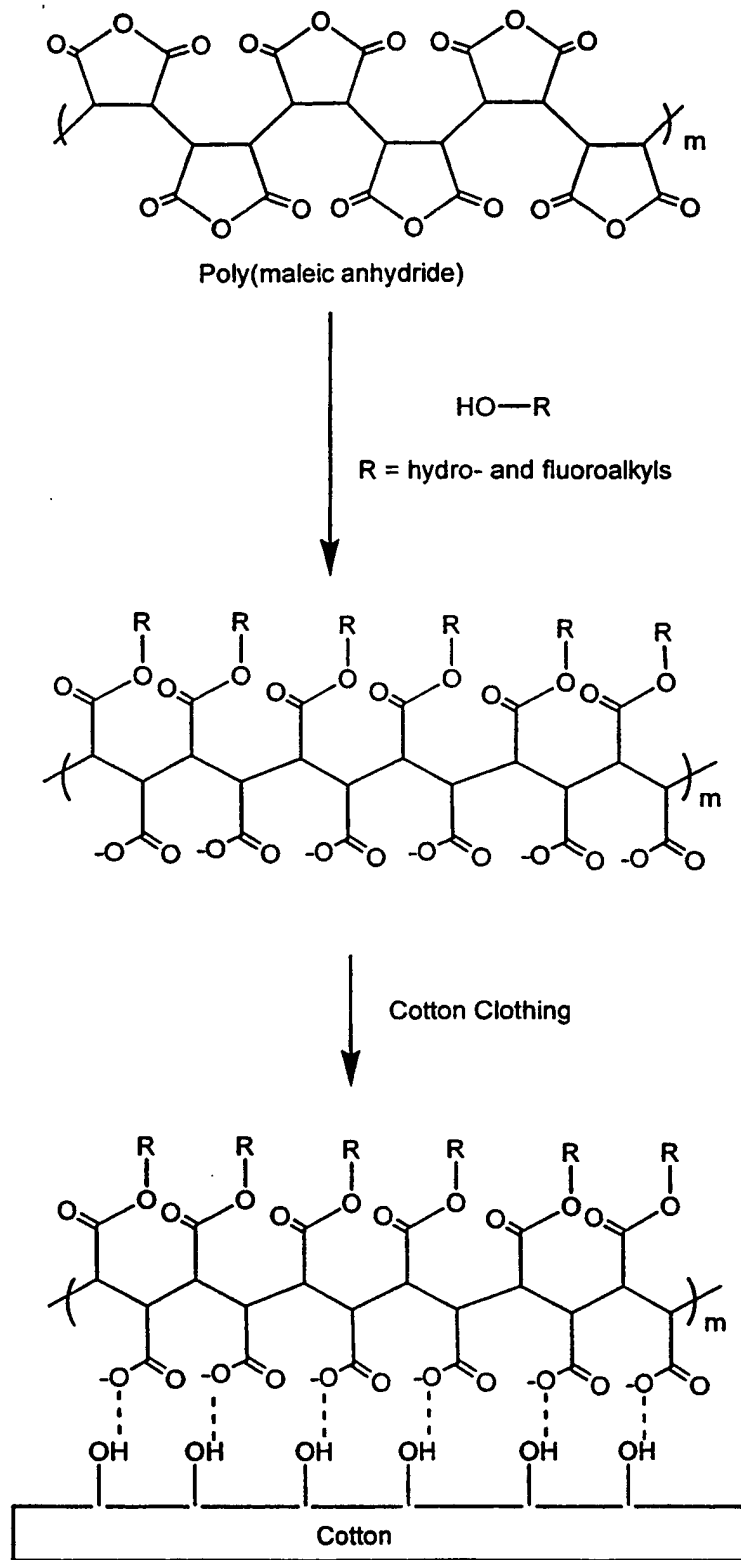


FIGURE 4




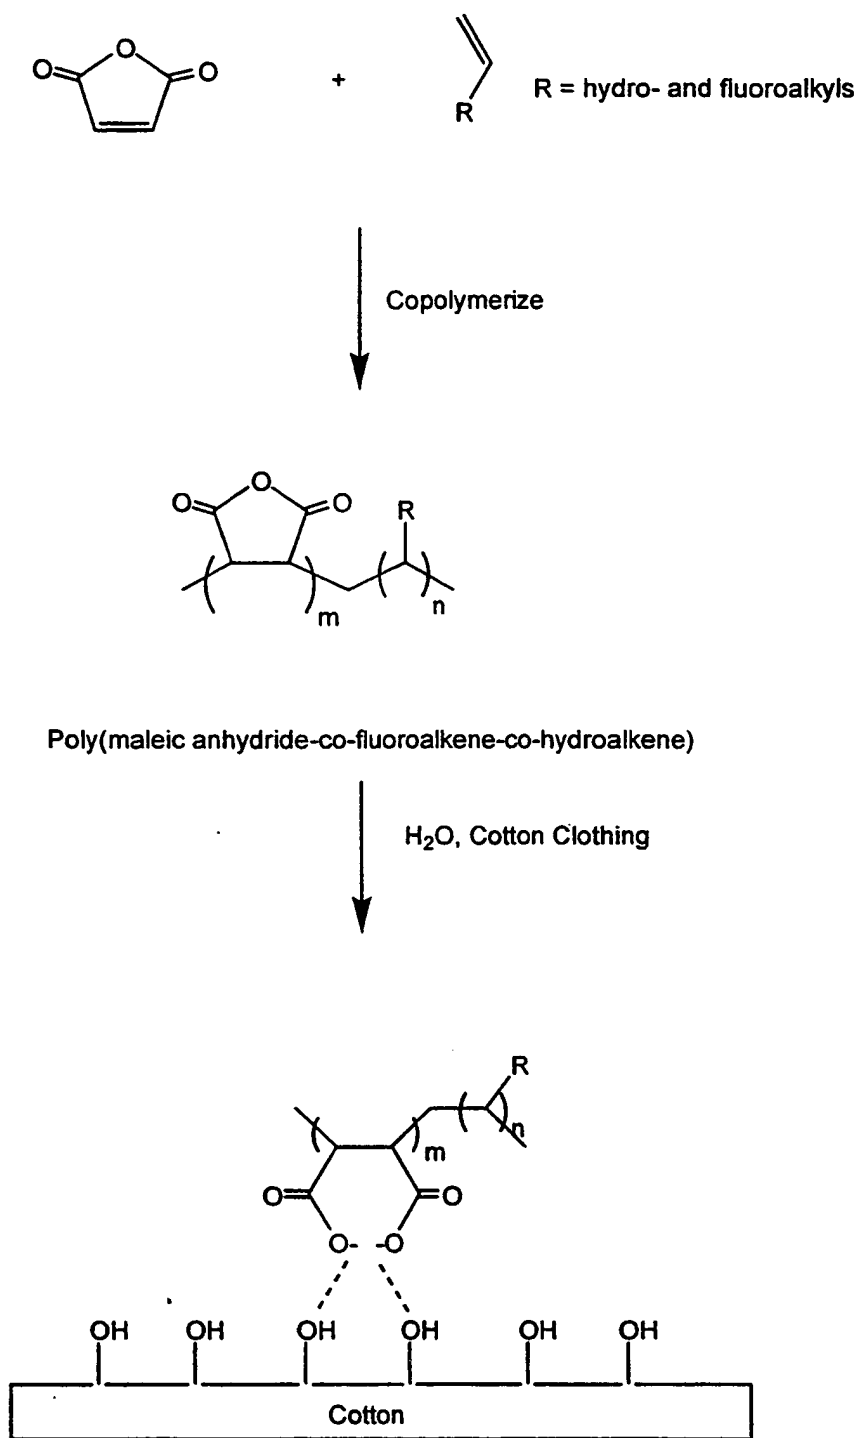


FIGURE 5



Poly(maleic anhydride)

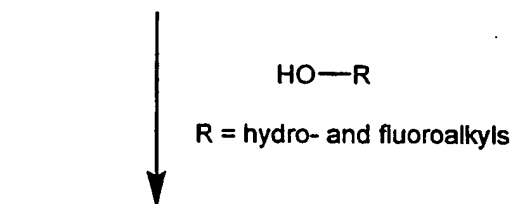

Wool Clothing
 H_2O , NaH_2PO_2 , heat

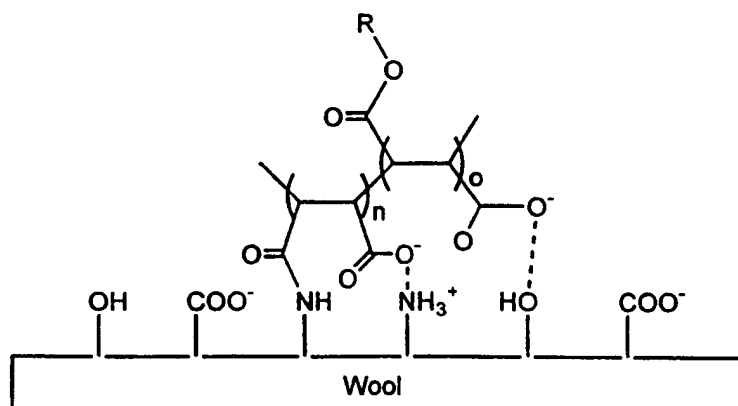


FIGURE 6

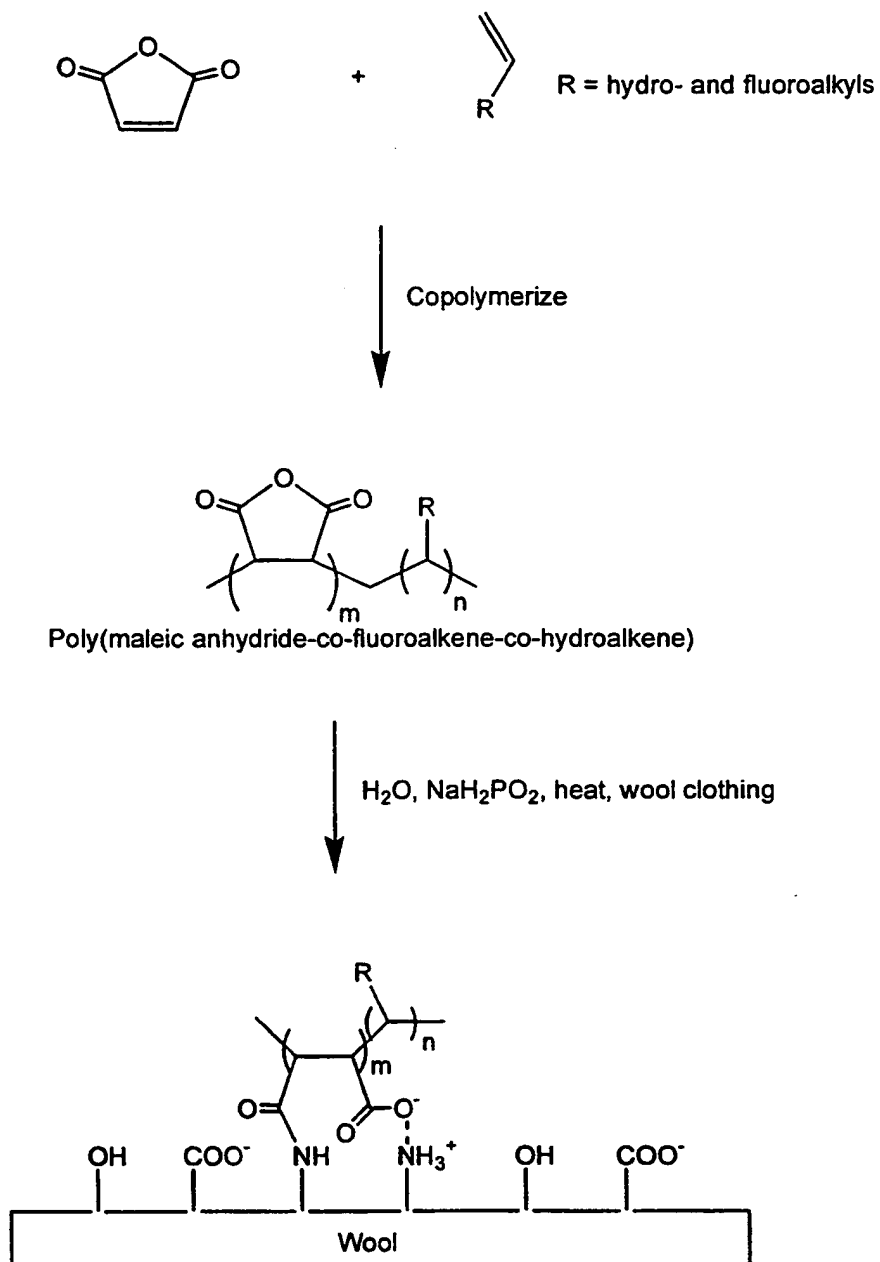


FIGURE 7

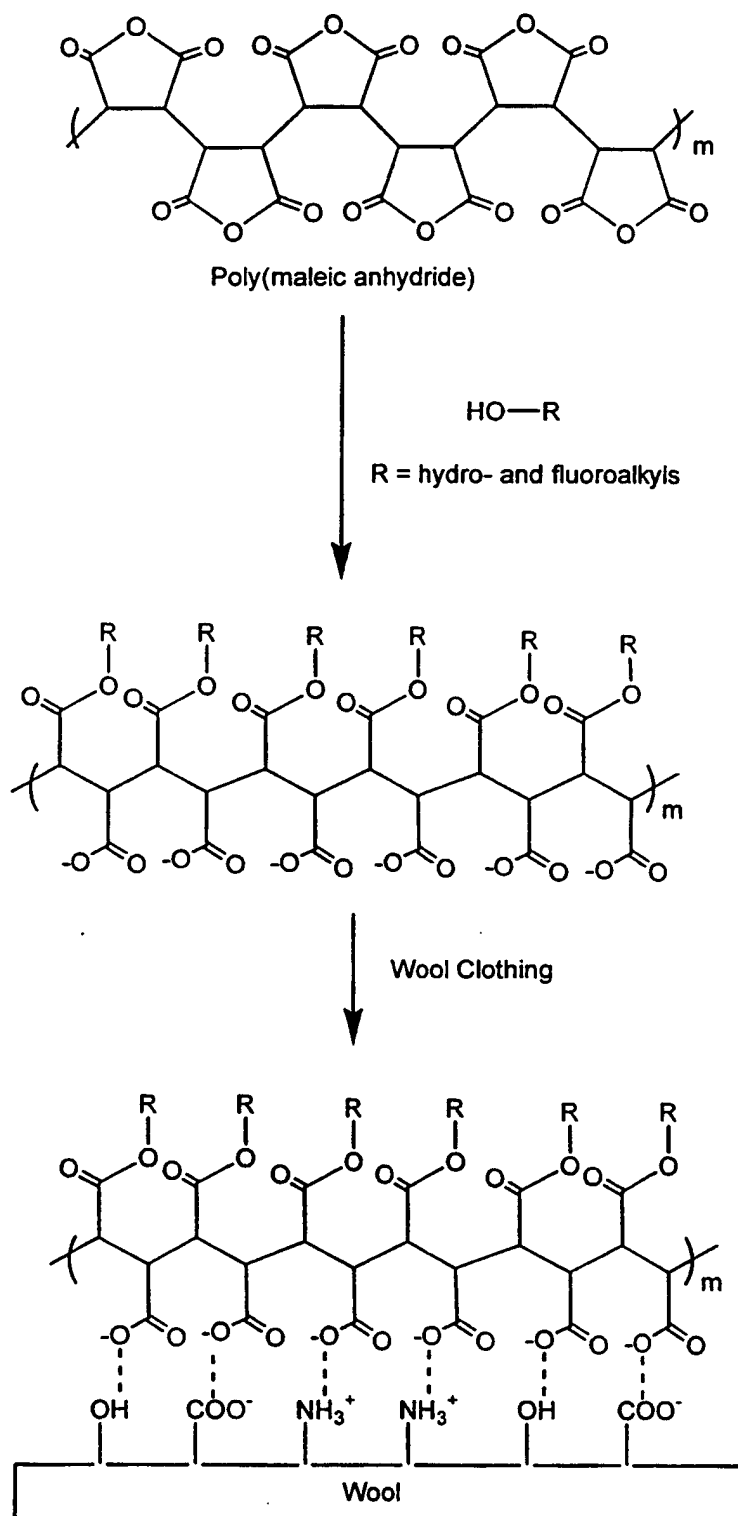


FIGURE 8

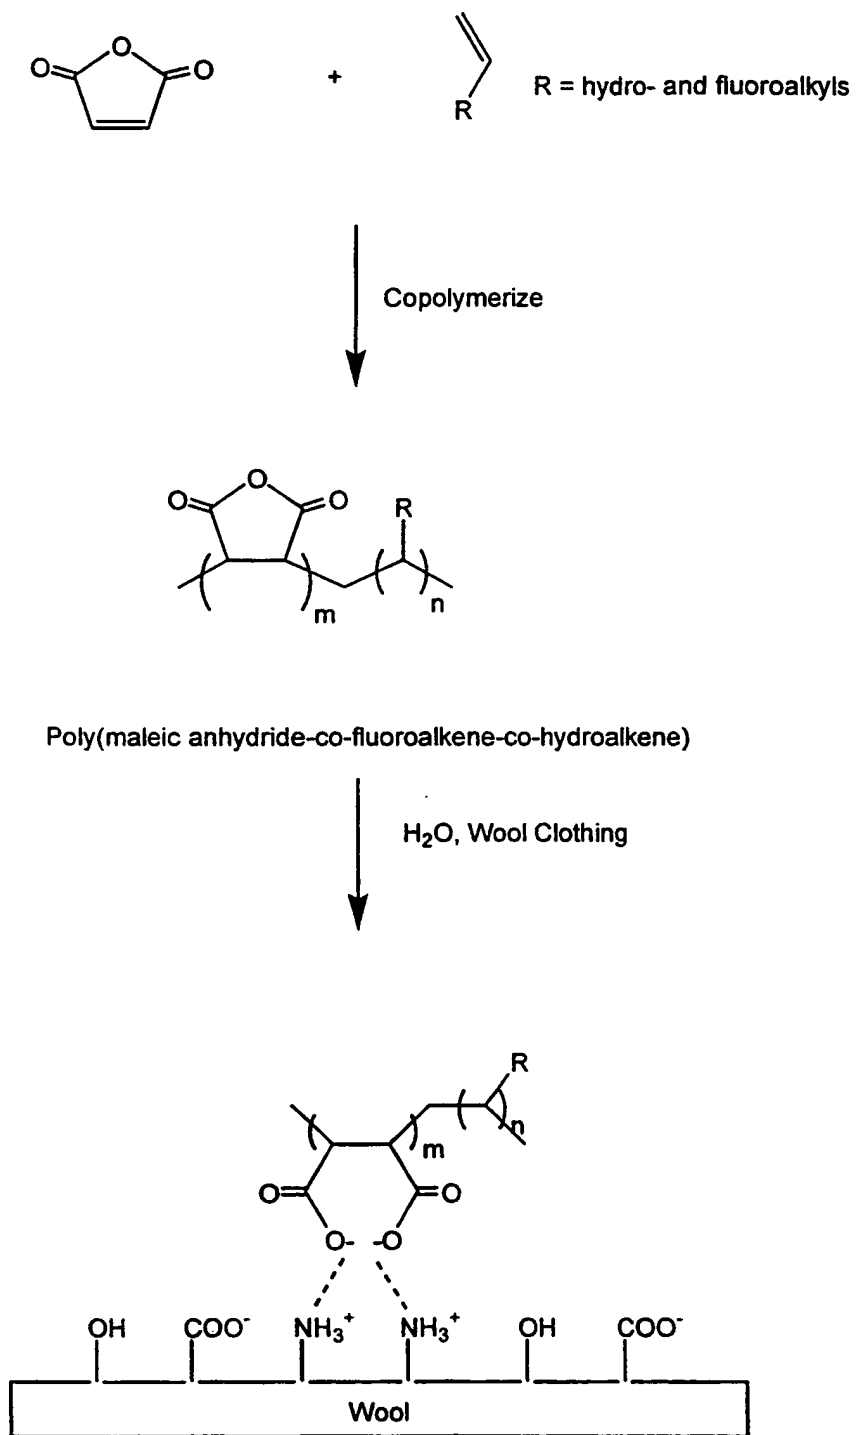


FIGURE 9

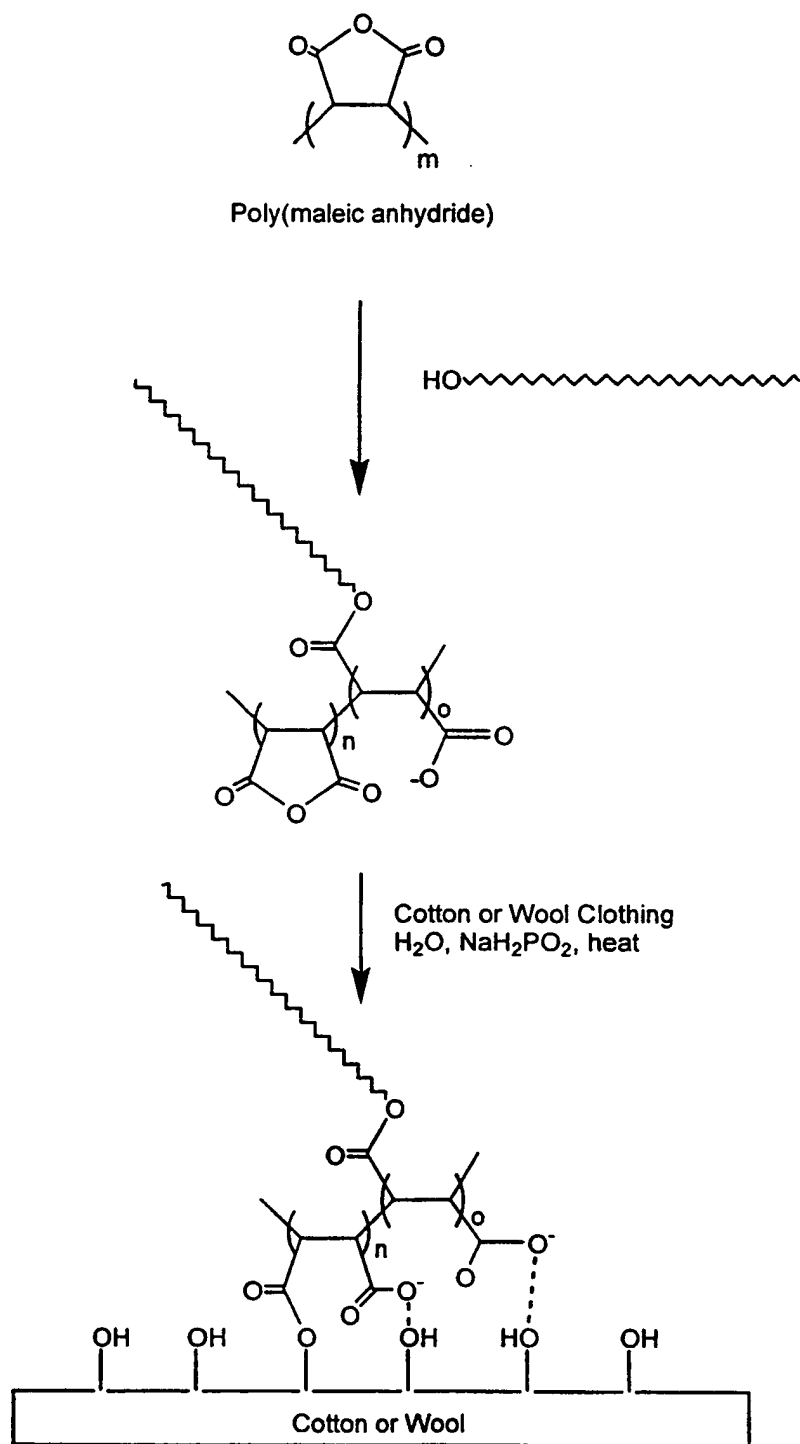


FIGURE 10

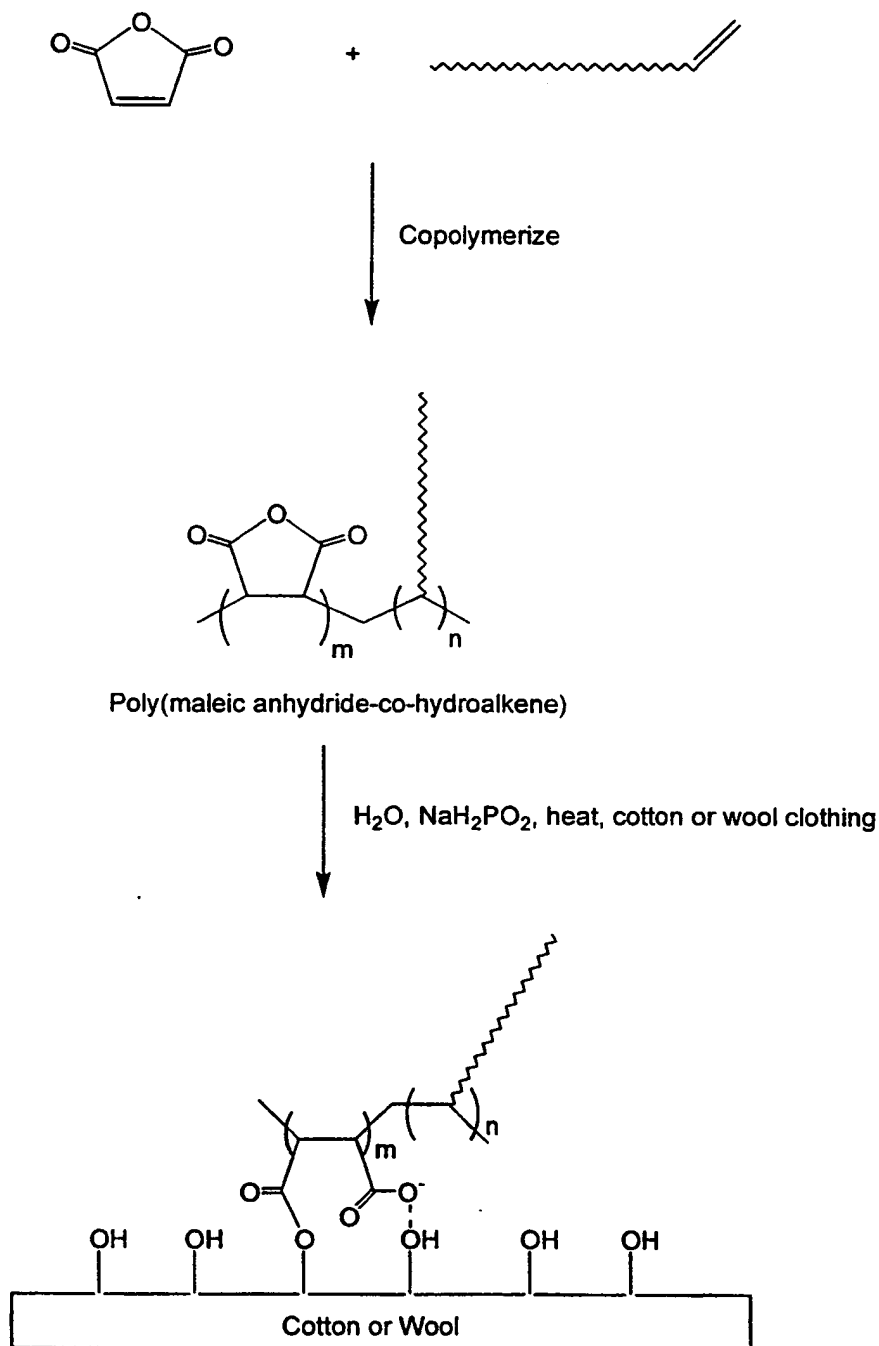
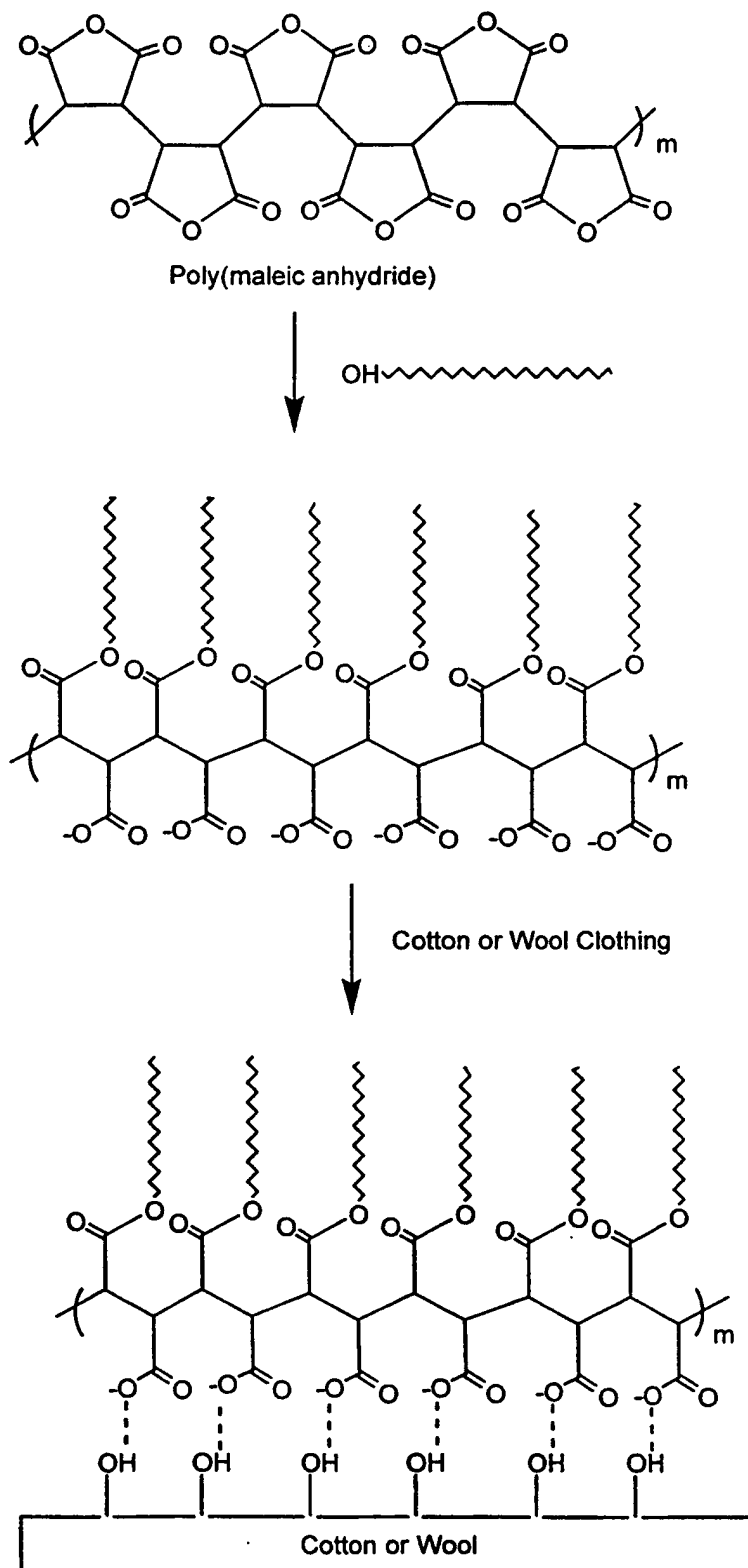


FIGURE 11

**FIGURE 12**

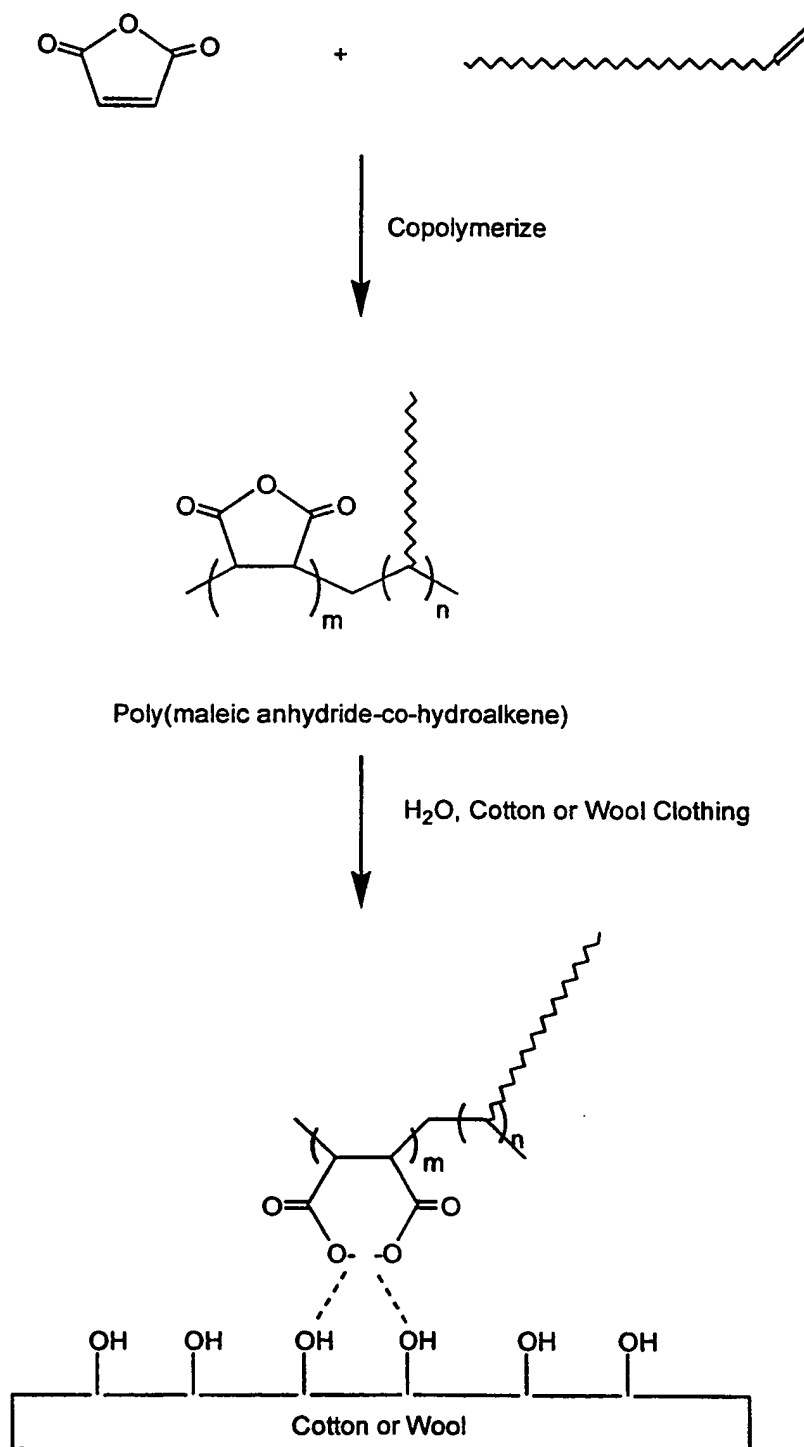
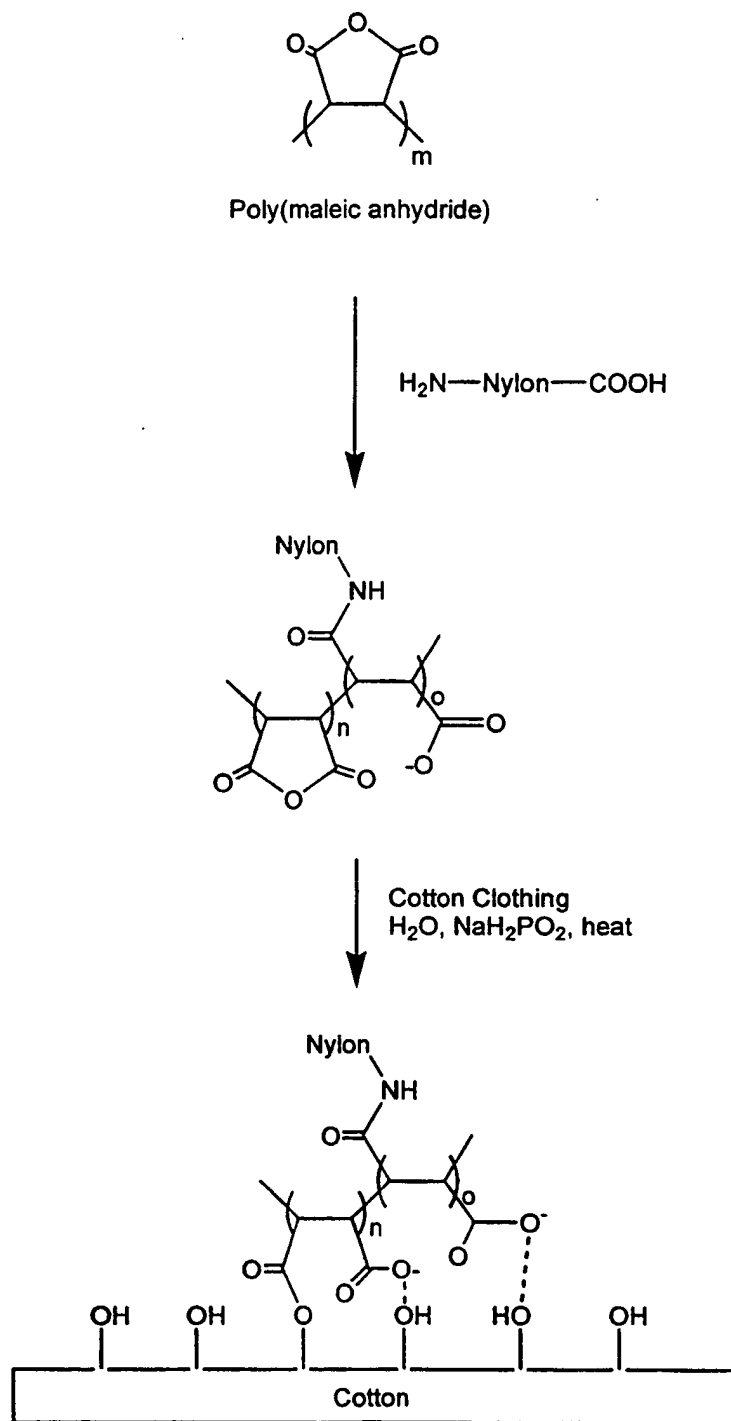


FIGURE 13

**FIGURE 14**

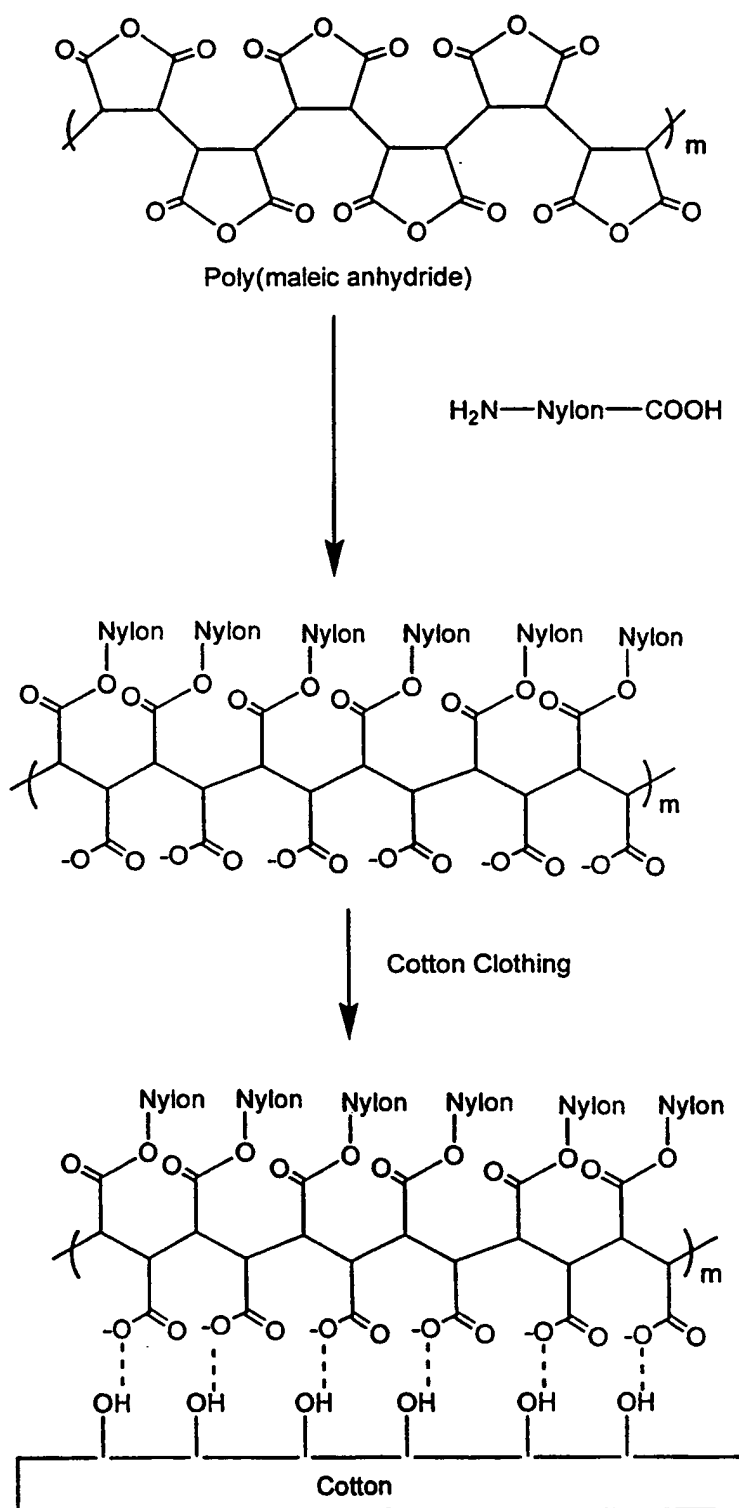


FIGURE 15

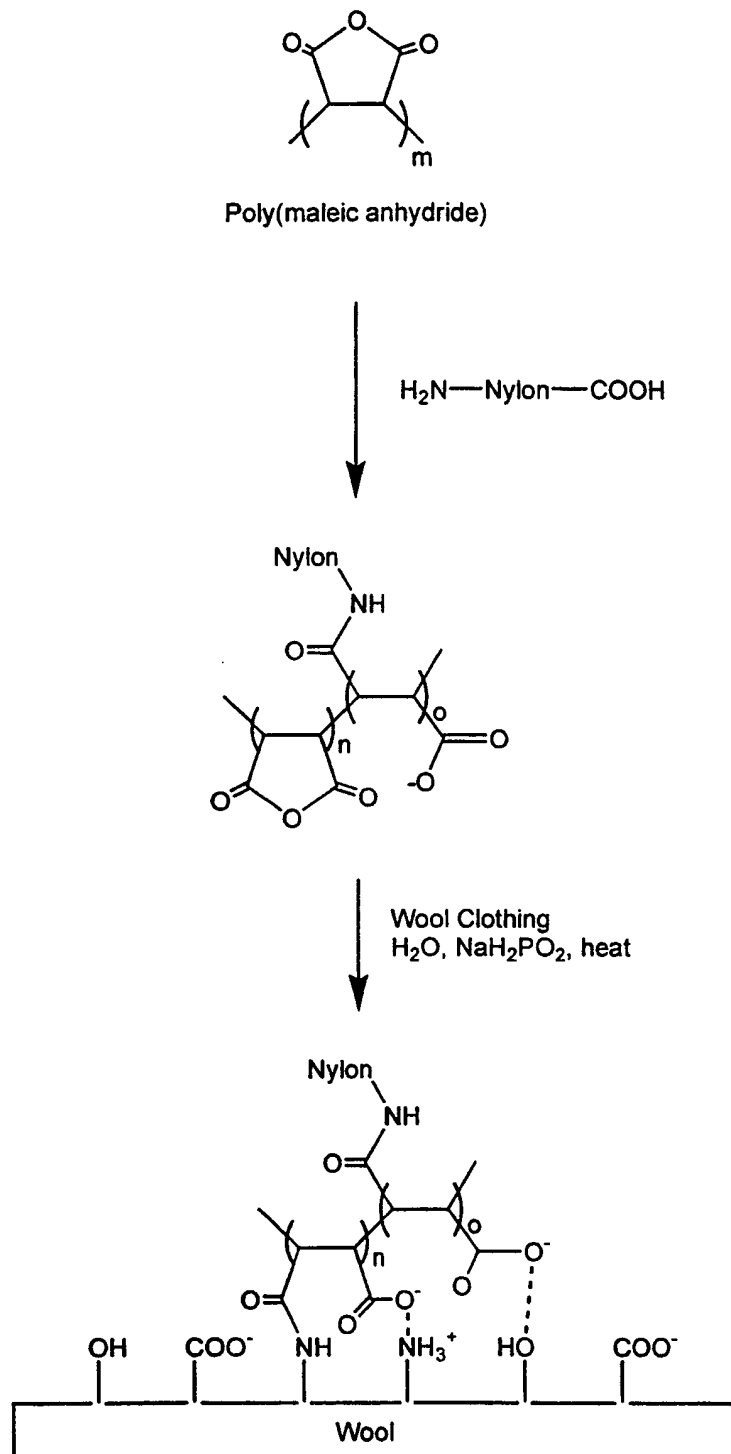


FIGURE 16

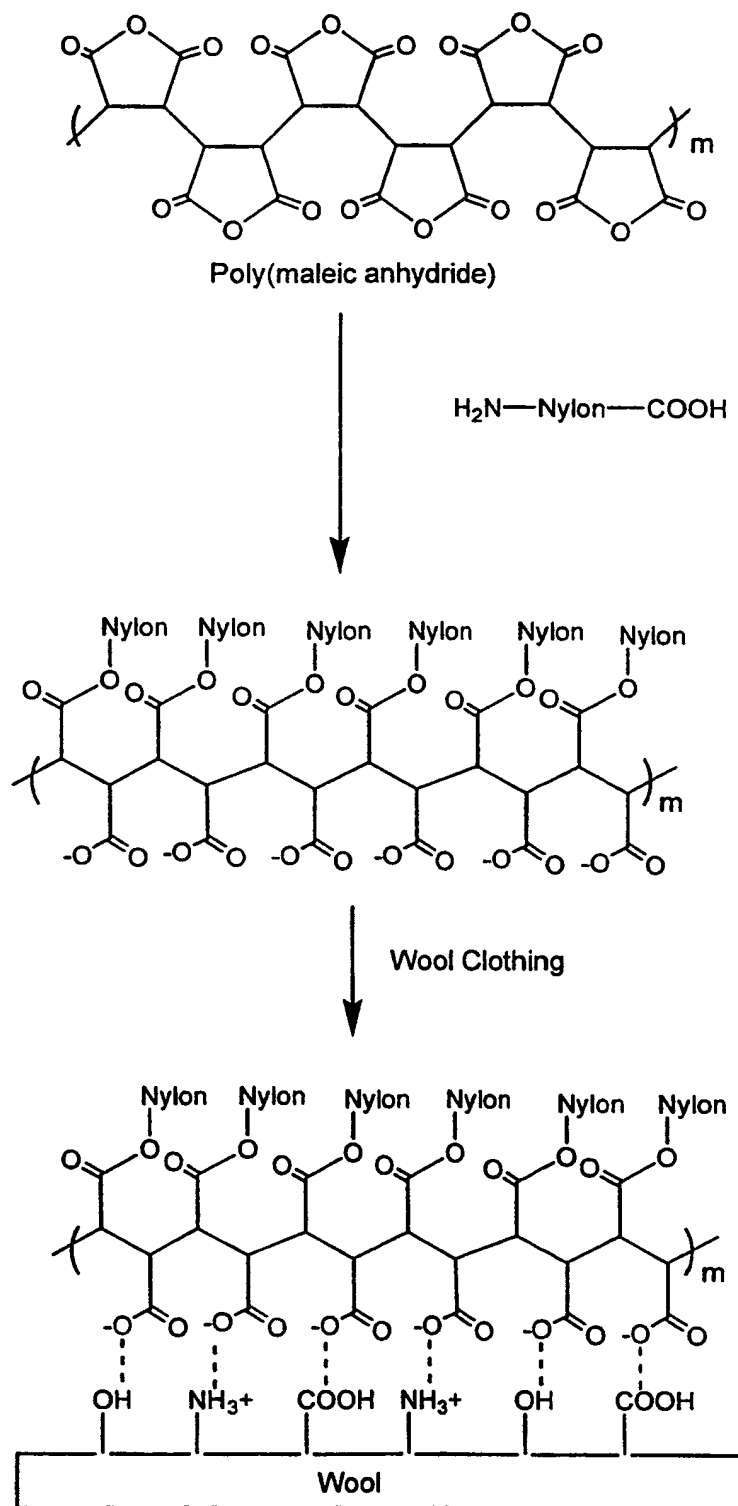


FIGURE 17


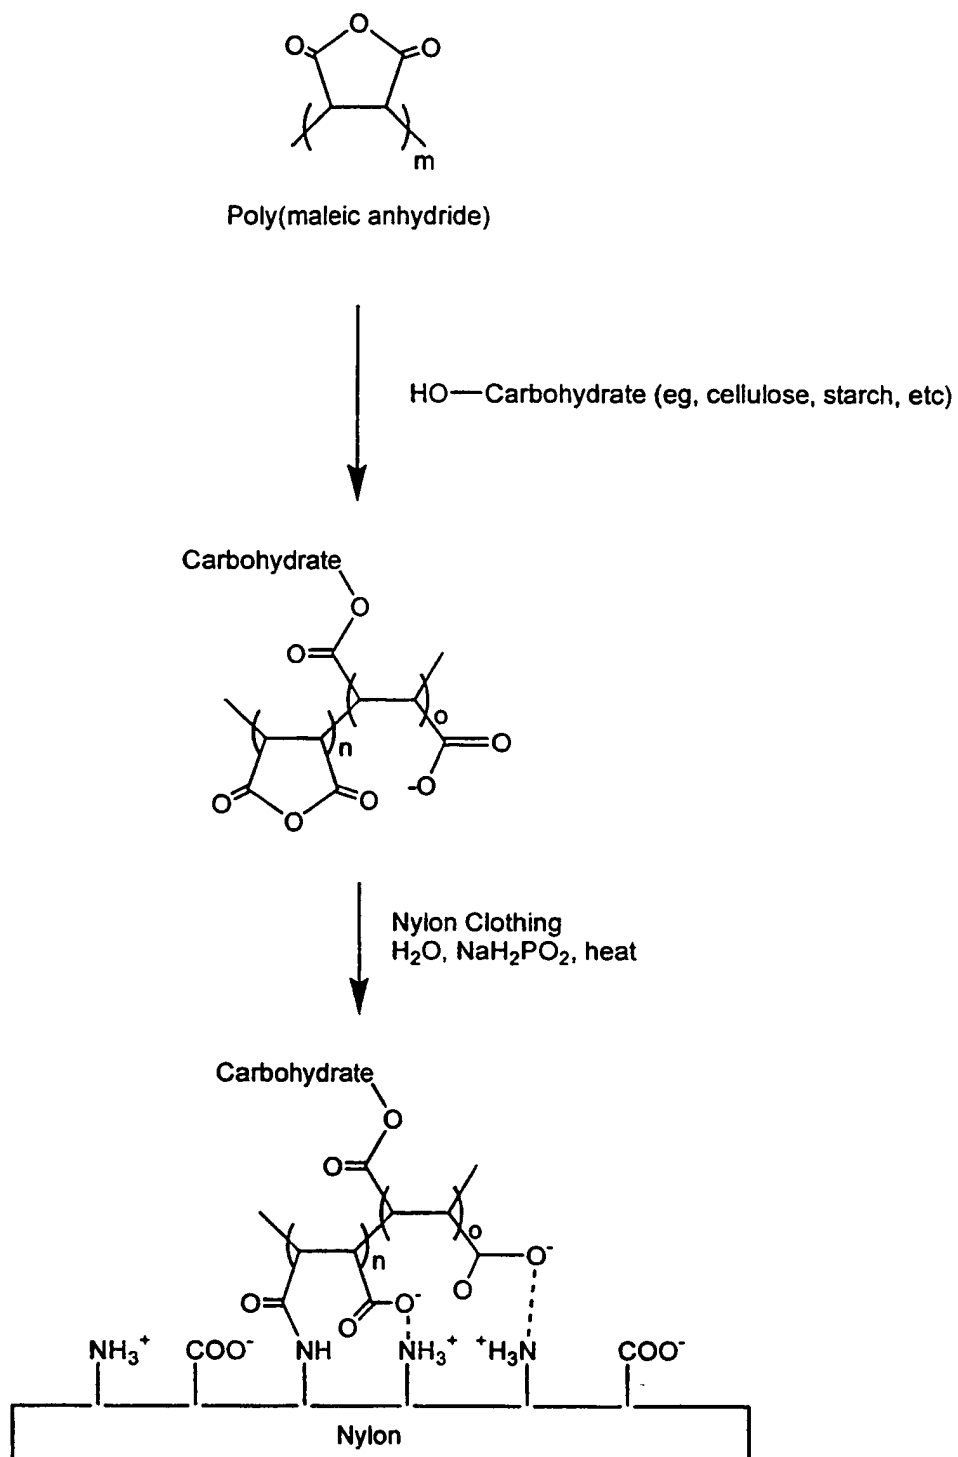


FIGURE 18



Poly(maleic anhydride)



HO—Carbohydrate (eg, cellulose, starch, etc)


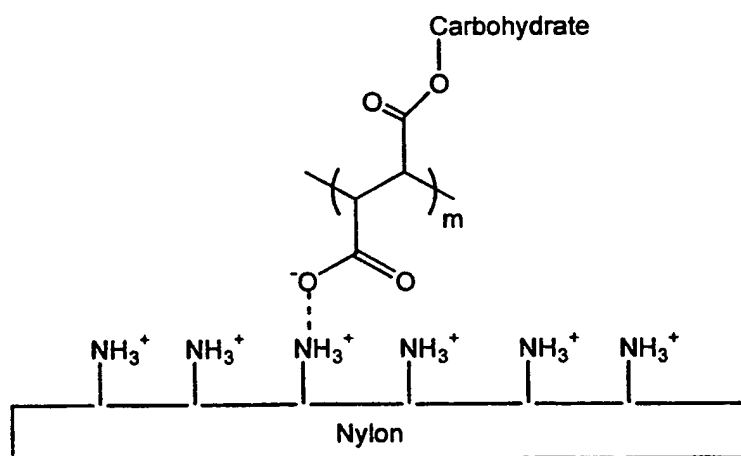
Nylon Clothing
H₂O, NaH₂PO₂, heat

FIGURE 19

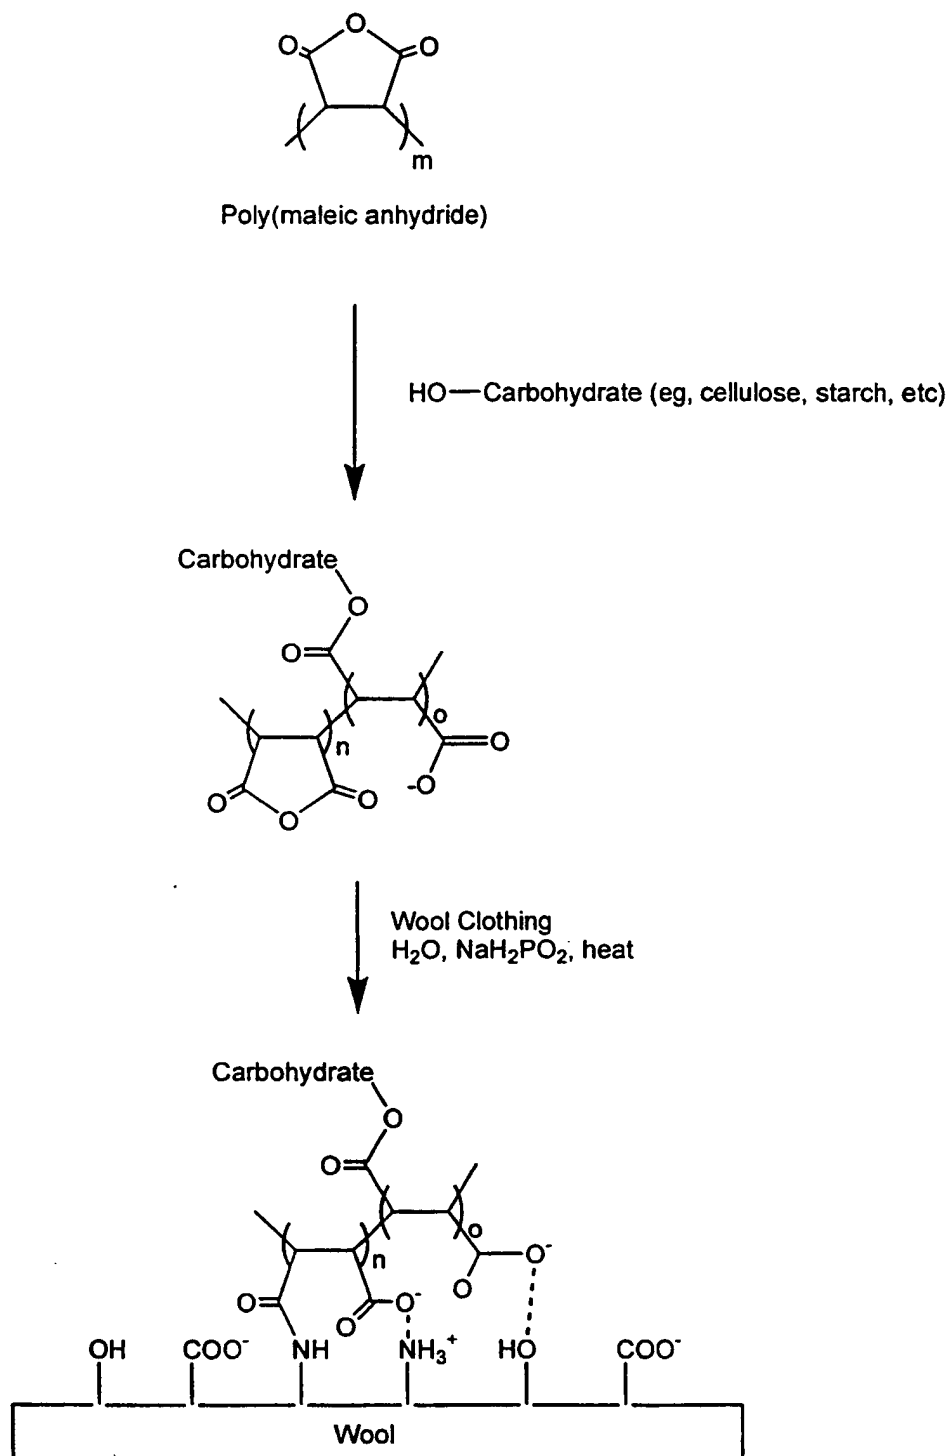


FIGURE 20

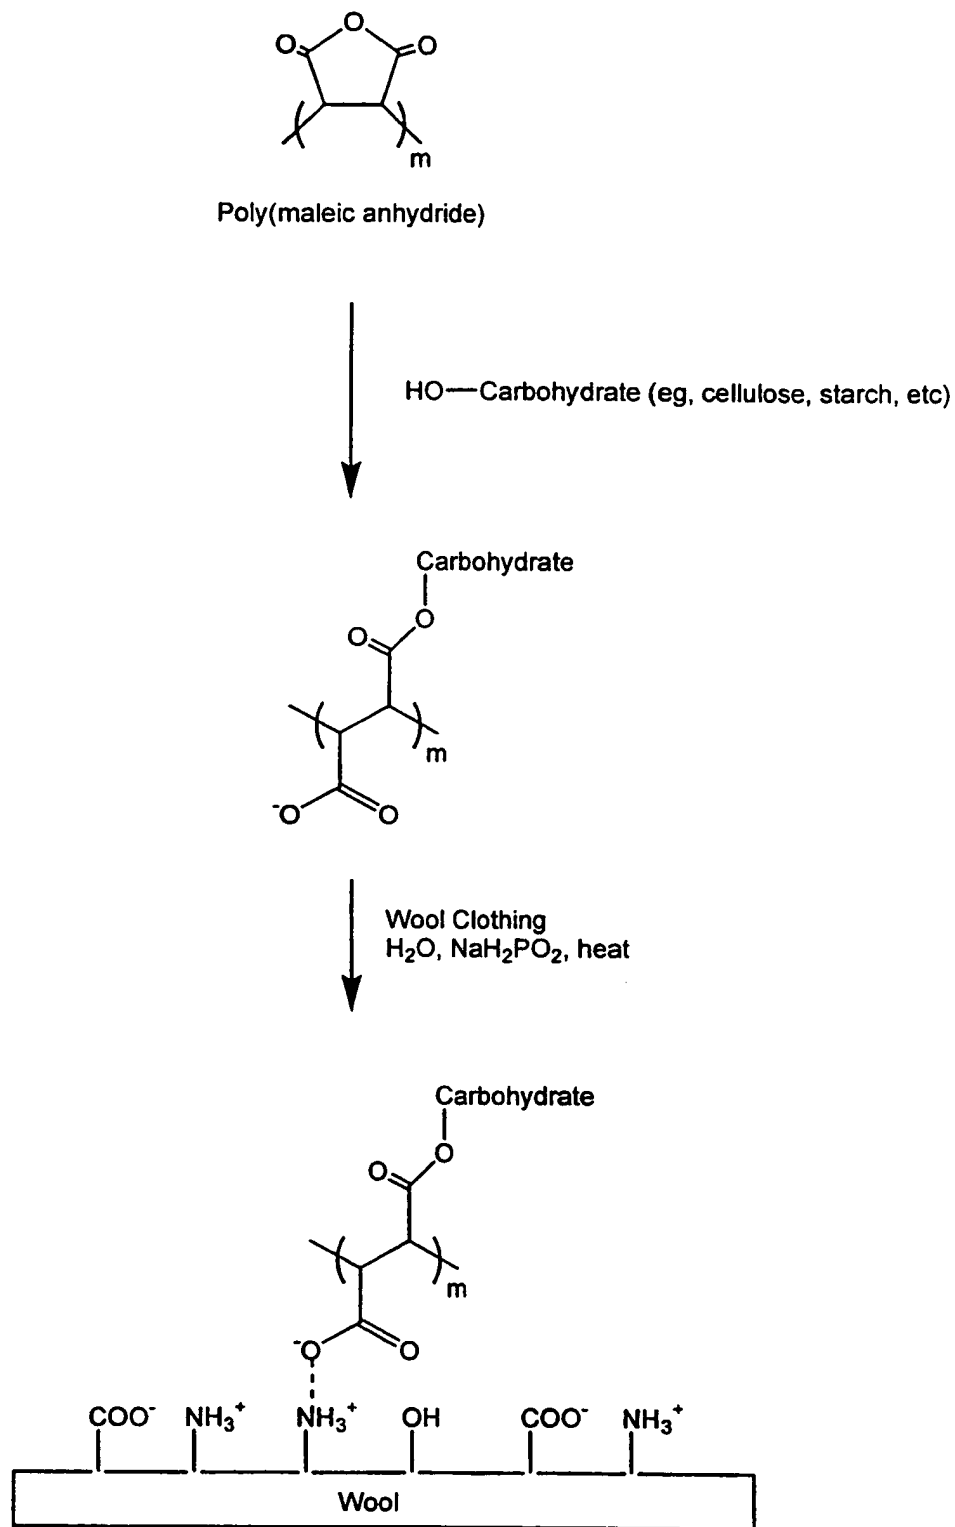


FIGURE 21



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D06M 15/263, 15/29, 15/03, 15/15, 14/00, 15/21, 15/05, 15/333, 15/53	A3	(11) International Publication Number: WO 99/49124 (43) International Publication Date: 30 September 1999 (30.09.99)															
(21) International Application Number: PCT/US99/06395 (22) International Filing Date: 23 March 1999 (23.03.99) (30) Priority Data: <table border="0"> <tr> <td>60/080,185</td> <td>24 March 1998 (24.03.98)</td> <td>US</td> </tr> <tr> <td>60/093,820</td> <td>23 July 1998 (23.07.98)</td> <td>US</td> </tr> <tr> <td>60/093,911</td> <td>23 July 1998 (23.07.98)</td> <td>US</td> </tr> <tr> <td>60/105,890</td> <td>27 October 1998 (27.10.98)</td> <td>US</td> </tr> <tr> <td>60/117,641</td> <td>28 January 1999 (28.01.99)</td> <td>US</td> </tr> </table> (71) Applicant (for all designated States except US): AVANT-GARB, LLC [US/US]; Suite B, 5764 Shellmound Street, Emeryville, CA 94608 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): SOANE, David, S. [US/US]; 109 King Avenue, Piedmont, CA 94610 (US). OFFORD, David, A. [US/US]; 4267 Mabel Avenue, Castro Valley, CA 94546 (US). (74) Agents: JOHNSTON, Madeline, I. et al.; Morrison & Foerster LLP, 755 Page Mill Road, Palo Alto, CA 94304-1018 (US).		60/080,185	24 March 1998 (24.03.98)	US	60/093,820	23 July 1998 (23.07.98)	US	60/093,911	23 July 1998 (23.07.98)	US	60/105,890	27 October 1998 (27.10.98)	US	60/117,641	28 January 1999 (28.01.99)	US	(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 9 December 1999 (09.12.99)
60/080,185	24 March 1998 (24.03.98)	US															
60/093,820	23 July 1998 (23.07.98)	US															
60/093,911	23 July 1998 (23.07.98)	US															
60/105,890	27 October 1998 (27.10.98)	US															
60/117,641	28 January 1999 (28.01.99)	US															
(54) Title: MODIFIED TEXTILE AND OTHER MATERIALS AND METHODS FOR THEIR PREPARATION (57) Abstract <p>Provided are compounds and methods for modifying a material to change properties of the material, as well as a variety of products obtained using the methods. The material which is modified may be, for example, a carbohydrate, and the modifiable functional groups on the material may be hydroxyls. Multifunctional molecules for use in modifying the surfaces of materials such as textile fibers, yarns and other fabrics made of or, including cotton, wool and nylon, are provided. The multifunctional molecules can include hydrophobic regions and/or hydrophilic regions. The multifunctional molecules also may include binding functional groups that permit either non-covalent or covalent binding to the material being modified, thus permitting the multifunctional molecule to form a non-covalent or covalent coating on the material. The methods and compounds disclosed herein may be used to modify materials to improve properties such as resistance, grease repellency, soil resistance, permanent press properties, and quickness of drying.</p>																	

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/06395

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 D06M15/263 D06M15/29 D06M15/03 D06M15/15 D06M14/00
D06M15/21 D06M15/05 D06M15/333 D06M15/53

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D06M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 294 648 A (DAIKIN IND LTD) 14 December 1988 (1988-12-14) page 2, line 40 -page 4, line 50; claims; examples ---	1-8, 14-16, 42,46-48
X,P	US 5 876 617 A (PAN HANGHUA ET AL) 2 March 1999 (1999-03-02) column 2, line 30 -column 3, line 42 ---	1-8,16, 42,46-48
X	WO 92 17636 A (MINNESOTA MINING & MFG) 15 October 1992 (1992-10-15) & US-A-3 849 521 page 4, line 26 -page 8, line 13 --- -/--	1-8, 14-17, 42,46-48

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

11 October 1999

Date of mailing of the international search report

22. 10. 99

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Koegler-Hoffmann, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/06395

C.(Continuation) D CUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 10605 A (DU PONT) 25 June 1992 (1992-06-25) claims 1-20 ---	1-7, 17-23, 25-32
A	EP 0 508 136 A (MATSUSHITA ELECTRIC IND CO LTD) 14 October 1992 (1992-10-14) the whole document ---	1,3
X	US 5 594 125 A (SEYSCHAB KARL ET AL) 14 January 1997 (1997-01-14) column 6, line 3 - line 23; claims ---	9
X	DE 195 20 989 A (CONSORTIUM ELEKTROCHEM IND) 12 December 1996 (1996-12-12) page 9, line 5 - line 31; claim 8 ---	9
X	DE 40 35 378 A (OEFFENTLICHE PRUEFSTELLE UND T) 14 May 1992 (1992-05-14) claims ---	9,46,49
X	DE 38 18 391 A (SEIKOH CHEMICAL CO ;AJINOMOTO KK (JP)) 15 December 1988 (1988-12-15) page 2, line 66 -page 3, line 10 page 11, line 58 - line 65 claims ---	10
X	WO 98 00500 A (UNILEVER PLC ;UNILEVER NV (NL)) 8 January 1998 (1998-01-08) page 7, line 22 - line 30; claims; examples ---	10,46,50
X	WO 97 11218 A (DU PONT) 27 March 1997 (1997-03-27) column 3, line 5 -column 4, line 38; claims ---	18,19, 21,22, 31-33, 43,46, 47,50
X	US 5 362 847 A (MILLER ROBERT ET AL) 8 November 1994 (1994-11-08) column 2, line 5 - line 22; claims ---	1,11
X	GB 809 745 A (IMPERIAL CHEMICAL INDUSTRIES LIM) page 1, line 49 - line 51; claims ---	1,11,12
X	WO 92 19680 A (NOVAMONT SPA) 12 November 1992 (1992-11-12) page 2, paragraph 3 -page 3, line 3 page 10, last paragraph -page 13, paragraph 1 claims ---	1,11-13

-/--

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/06395

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 543 214 A (GROSHENS PIERRE ET AL) 6 August 1996 (1996-08-06) column 5, line 3 - line 5 claims ---	37,39-41
X	EP 0 300 370 A (HERCULES INC) 25 January 1989 (1989-01-25) column 1, line 1 -column 3, line 58; claims ---	37,39, 40,45
X	US 4 314 805 A (MCKNIGHT EUGENE A) 9 February 1982 (1982-02-09) column 2, line 19 -column 5, line 68 ---	37-40,45
A	A.S.HOFFMANN: "Intelligent " polymers in medicine and biotechnology" MACROMOL.SYMP., vol. 98, 1995, pages 645-664, XP002118351 cited in the application page 648 -page 649 -----	37

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 99/06395

B x I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-8,14-17,18(partly),19-21,23,26-33,42,43,46-48

A method of modifying a textile material, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer comprises hydrophobic and hydrophilic groups.

Group 1 concerns a multifunctional polymer which is formed by polymerization of hydrophobic monomers and hydrophilic monomers.

Under the aspect that the modified poly(maleic anhydride) polymer claimed in claim 18 is a copolymer, the subject matter of claim 18 (and the subject matter of the dependent claims) falls within the scope of group 1.

2. Claims: 1,9,10,18(partly),19-25,31-36,42,43(partly),44,49-51

A method of modifying a textile material, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer comprises hydrophobic and hydrophilic groups.

Group 2 concerns a multifunctional polymer which polymer is modified by the covalent attachment of a molecule comprising hydrophobic and hydrophilic groups.

Under the aspect that the modified poly(maleic anhydride) polymer comprises a a poly(maleic anhydride polymer modified by the covalent attachment of a hydrophobic or a hydrophilic molecule, the subject matter of claim 18 (and the dependent claims) falls within the scope of group 2.

3. Claims: 1,11-13,42

A method of modifying a textile material, the method comprising attaching a multifunctional polymer to the material, wherein the multifunctional polymer comprises hydrophobic and hydrophilic groups.

Group 3 concerns a multifunctional polymer which is a graft copolymer.

4. Claims: 37-41,45

A method of modifying a textile material, the method comprising attaching an upper critical solution temperature

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

polymer to the material.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/06395

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0294648	A	14-12-1988	DE 3877261 A	18-02-1993
			JP 1056711 A	03-03-1989
			JP 1983692 C	25-10-1995
			JP 7013118 B	15-02-1995
			US 5055538 A	08-10-1991

US 5876617	A	02-03-1999	JP 10237133 A	08-09-1998

WO 9217636	A	15-10-1992	BR 9205831 A	02-08-1994
			CA 2105276 A	03-10-1992
			DE 69212505 D	29-08-1996
			DE 69212505 T	27-02-1997
			EP 0646196 A	05-04-1995
			JP 6506966 T	04-08-1994

WO 9210605	A	25-06-1992	AU 660639 B	06-07-1995
			AU 9157391 A	08-07-1992
			CA 2098120 A	14-06-1992
			DE 69109694 D	14-06-1995
			DE 69109694 T	11-01-1996
			EP 0562024 A	29-09-1993
			EP 0648886 A	19-04-1995
			JP 6503386 T	14-04-1994
			MX 9102558 A	01-06-1992
			US 5460887 A	24-10-1995
			US 5707708 A	13-01-1998
			US 5654068 A	05-08-1997
			US 5834088 A	10-11-1998
			ZA 9109847 A	14-06-1993

EP 0508136	A	14-10-1992	JP 2820167 B	05-11-1998
			JP 4289273 A	14-10-1992
			JP 4370201 A	22-12-1992
			JP 4366631 A	18-12-1992
			JP 2921533 B	19-07-1999
			JP 6200405 A	19-07-1994
			DE 69225743 D	09-07-1998
			DE 69225743 T	24-09-1998
			KR 9504492 B	01-05-1995
			US 5474839 A	12-12-1995

US 5594125	A	14-01-1997	DE 4428654 A	15-02-1996
			EP 0696599 A	14-02-1996
			JP 2654377 B	17-09-1997
			JP 8059703 A	05-03-1996

DE 19520989	A	12-12-1996	NONE	

DE 4035378	A	14-05-1992	NONE	

DE 3818391	A	15-12-1988	JP 1056734 A	03-03-1989
			JP 2520263 B	31-07-1996

WO 9800500	A	08-01-1998	AU 3438197 A	21-01-1998

WO 9711218	A	27-03-1997	US 5770656 A	23-06-1998
			AU 6975396 A	09-04-1997
			EP 0851948 A	08-07-1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/06395

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5362847	A	08-11-1994	WO 9311179 A	10-06-1993
GB 809745	A		BE 556214 A	
			FR 1177730 A	29-04-1959
WO 9219680	A	12-11-1992	EP 0525245 A	03-02-1993
			IT 1245485 B	20-09-1994
			IT 1256693 B	12-12-1995
			IT 1263114 B	30-07-1996
			AT 155161 T	15-07-1997
			AU 658180 B	06-04-1995
			AU 1650992 A	21-12-1992
			AU 658207 B	06-04-1995
			AU 2058292 A	04-02-1993
			BR 9205258 A	27-07-1993
			CA 2074649 A	02-02-1993
			CA 2084994 A	04-11-1992
			CN 1071588 A	05-05-1993
			CN 1077966 A,B	03-11-1993
			DE 9219021 U	27-02-1997
			DE 69220754 D	14-08-1997
			DE 69220754 T	04-12-1997
			DE 539541 T	30-01-1997
			DK 539541 T	15-09-1997
			EP 0539541 A	05-05-1993
			ES 2103943 T	01-10-1997
			FI 925978 A	31-12-1992
			GR 3024078 T	31-10-1997
			JP 5228205 A	07-09-1993
			JP 2527523 B	28-08-1996
			JP 6502676 T	24-03-1994
			KR 9608112 B	20-06-1996
			LV 12151 A	20-10-1998
			LV 12151 B	20-12-1998
			RU 2095379 C	10-11-1997
			SK 390192 A	07-12-1994
			RU 2089151 C	10-09-1997
			US 5286770 A	15-02-1994
			US 5412005 A	02-05-1995
			AT 127034 T	15-09-1995
			DE 69204351 D	05-10-1995
			DE 69204351 T	11-04-1996
			DK 512360 T	18-09-1995
			EP 0512360 A	11-11-1992
			ES 2077280 T	16-11-1995
			GR 3017583 T	31-12-1995
			JP 5123550 A	21-05-1993
			PL 174799 B	30-09-1998
			US 5534150 A	09-07-1996
			AT 165385 T	15-05-1998
			DE 69318058 D	28-05-1998
			DE 69318058 T	10-09-1998
			EP 0560244 A	15-09-1993
			ES 2116364 T	16-07-1998
			IL 104942 A	10-06-1997
US 5543214	A	06-08-1996	FR 2625747 A	13-07-1989
			AT 105319 T	15-05-1994

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/06395

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5543214 A		DE 68915005 D	09-06-1994
		DE 68915005 T	29-09-1994
		EP 0326443 A	02-08-1989
		ES 2052036 T	01-07-1994
		JP 2133678 A	22-05-1990
		JP 2708838 B	04-02-1998

EP 0300370 A	25-01-1989	CA 1328088 A	29-03-1994
		DE 3872082 A	23-07-1992
		JP 1033277 A	03-02-1989

US 4314805 A	09-02-1982	NONE	
